

# Vehicle emissions prediction model (VEPM 5.3) user guide

Version 2.0, April 2018



# Vehicle emissions prediction model (VEPM 5.3) user guide v2.0

NZ Transport Agency  
April 2018

ISBN 978-0-478-40759-4 (print)  
ISBN 978-0-478-40760-0 (online)

Copyright: 2018 NZ Transport Agency

## National Office

Victoria Arcade  
50 Victoria Street  
Private Bag 6995  
Wellington 6141  
New Zealand

**T** 64 4 894 5400

**F** 64 4 894 6100

© Copyright information

This publication is copyright © NZ Transport Agency. Material in it may be reproduced for personal or in-house use without formal permission or charge, provided suitable acknowledgement is made to this publication and the NZ Transport Agency as the source. Requests and enquiries about the reproduction of material in this publication for any other purpose should be made to:

Manager, Information  
NZ Transport Agency  
Private Bag 6995  
Wellington 6141

The permission to reproduce material in this publication does not extend to any material for which the copyright is identified as being held by a third party. Authorisation to reproduce material belonging to a third party must be obtained from the copyright holder(s) concerned.

## Acknowledgements

This guide acknowledges the input from:

Auckland Council (AC) - as the Auckland Regional Council funded the original development of VEPM by Auckland UniServices Ltd.

NZ Transport Agency - co-funded with AC the update of VEPM v3 to v5; fund the UoA to provide ongoing support of VEPM to end-users and to maintain a watching-brief on relevant vehicle emission factor research development.

Ministry of Transport (MoT) - VEPM vehicle fleet data.

Auckland Uniservices, University of Auckland (UoA) - VEPM research and development.

Emission Impossible - technical advisors to the stakeholder group funded by the Transport Agency.

NIWA - VEPM related research undertaken as part of the Ministry of Business, Innovation and Employment funded 'Healthy Urban Atmosphere' programme.

# Contents

<b>Foreword</b>	<b>4</b>
<b>1 Introduction</b>	<b>5</b>
1.1 Emissions models	5
1.2 The vehicle emissions prediction model (VEPM)	6
1.3 Version 5.3	7
1.4 Purpose	8
1.5 Limitations	9
<b>2 Using VEPM</b>	<b>11</b>
2.1 Getting started	11
2.2 Input data - VEPM worksheet	12
2.3 Calculating emissions factors - VEPM worksheet	13
2.4 Input data - bulk run	15
2.5 Optional model inputs	18
<b>3 Emission factor calculations in VEPM</b>	<b>20</b>
3.1 Overall structure of VEPM	20
3.2 Calculation of total emission factors	21
3.3 Calculation of fleet weighted emission factors in VEPM	24
<b>4 Emissions information</b>	<b>26</b>
4.1 Particulate matter	26
4.2 Gradient effects	27
4.3 Link lengths	28
4.4 Speed variation	29
4.5 Idle emissions rates	30
<b>5 Validation of VEPM</b>	<b>32</b>
5.1 New Zealand vehicle emissions factors database	32
5.2 Validation of trends predicted by VEPM by comparison with measured trends in on-road vehicle emissions	34
<b>6 Future updates</b>	<b>34</b>
<b>Appendix A - Reference tables</b>	<b>35</b>
<b>References</b>	<b>38</b>
<b>Glossary of terms and abbreviations</b>	<b>39</b>

# Foreword

Vehicle emission models are frequently used for assessing potential environmental effects that arise from land transport projects. The Vehicle Emissions Prediction Model (VEPM) has been developed by the NZ Transport Agency and Auckland Council to predict emissions from vehicles in the New Zealand fleet under typical road, traffic and operating conditions. The model provides estimates that are suitable for air quality assessments and regional emissions inventories. An important feature of the model is the ability to estimate changes to vehicle emissions in future years (out to 2040).

VEPM is an Excel spreadsheet which is publicly available upon request from the VEPM helpdesk:

e-mail: [vepm@auckland.ac.nz](mailto:vepm@auckland.ac.nz)

VEPM was originally developed for the Auckland Regional Council in 2008<sup>01</sup>. The model was developed to:

- predict emissions for vehicles in the New Zealand fleet under typical road, traffic and operating conditions; and
- be suitable for air quality assessment projects on a regional and national basis.

Since its release in 2008, VEPM has been successfully used in Auckland and around New Zealand to estimate vehicle emissions in air quality assessments of road projects. An important feature of vehicle emissions, however, is that they change significantly over time. This is because vehicle emissions, collectively, can be significant sources of air pollution and governments around the world have acted to successively tighten emissions regulations.

In recognition of the changing emissions profile for the New Zealand fleet, and reflecting the widespread use of VEPM, in 2009 the Transport Agency jointly funded an update with the Auckland Regional Council (now Auckland Council). Accordingly, VEPM 5.0 was publicly released in 2012<sup>02</sup>.

Later in 2012 another update was released as version 5.1<sup>03</sup>. Key technical changes to VEPM in each public release date are summarised below:

- 2008 VEPM 3.0 based on emissions measurements in the United Kingdom National Atmospheric Emissions Inventory (UK NAEI) database from the 1990s and early 2000s. To estimate emissions from the Japanese vehicle fleet, a detailed comparison of Japanese and European emission factors was undertaken.
- 2011 VEPM 5.0 based on updated emissions measurements from the UK NAEI database (2009) and the European COPERT 4, version 8, 2011 database. VEPM 5.0 includes emissions from hybrid vehicles, the effects of gradient,  $PM_{2.5}$  as output and updated (2010) fleet profile data for New Zealand vehicles. Extensive work was undertaken to calibrate VEPM 5.0 against all available emissions data from New Zealand.
- 2012 VEPM 5.1 incorporates emission factors for light duty vehicles at different road gradients from the World Road Association<sup>04</sup>.

Additional supporting technical information may be found in references <sup>05</sup>, <sup>06</sup>, <sup>07</sup> and <sup>08</sup>.

.....  
**01** Energy and Fuels Research Unit, Auckland University (2008) *Development of a vehicle emissions prediction model*.

.....  
**02** Energy and Fuels Research Unit, Auckland University (2011) *Vehicle emissions prediction model (VEPM) version 5.0: development and user information report*.

.....  
**03** Energy and Fuels Research Unit, Auckland University (2012) *Vehicle emissions prediction model (VEPM) version 5.1*.

.....  
**04** World Road Association, PIARC Technical Committee on Road Tunnel Operation (C5) (2004) *Road tunnels: vehicle emissions and air demand for ventilation*. [www.piarc.org](http://www.piarc.org)

.....  
**05** Energy and Fuels Research Unit, Auckland University (2010) *Vehicle emissions prediction model update: phase 1*.

.....  
**06** Energy and Fuels Research Unit, Auckland University (2010) *Vehicle emissions prediction model update: Phase 2 progress report*.

.....  
**07** Energy and Fuels Research Unit, Auckland University (2011) *Vehicle emissions prediction model update: COPERT 4 review*.

.....  
**08** Energy and Fuels Research Unit, Auckland University (2011) *Cold start exhaust emissions performance: comparison of vehicle build technologies*.

# 1 Introduction

## 1.1 Emissions models

In order to assess the air quality effects of road projects, or changes in vehicle technology or fleet characteristics it is necessary to estimate the tailpipe emissions from motor vehicles. This can be achieved through the use of emission factors.

Emissions factors are the amount of emissions of the various pollutants – carbon monoxide (CO), hydrocarbons (HC), nitrogen oxides (NO<sub>x</sub>) and particulate matter (PM) – produced per kilometre driven.

Vehicle emissions are primarily dependent on the vehicle type and fuel. Carbon monoxide and hydrocarbon emissions from petrol vehicles are much higher compared with diesel vehicles, while diesel vehicles tend to have much higher emissions of particulate and nitrogen oxides. Vehicle emissions are also dependent on the driving conditions. For example, emissions are different for any given vehicle under acceleration or deceleration, at different speeds and engine loads.

Various vehicle emissions models have been developed internationally with different levels of complexity for different uses. These can be classified by generic model type. The most common model types are shown in table 1.1, together with their applications:

TABLE 1.1 Emissions models

TYPE	INPUT DATA REQUIRED TO DEFINE VEHICLE OPERATION	CHARACTERISTIC	APPLICATION
Aggregate	Area or road type	Simplest level, no speed or vehicle specific dependency	National inventories
Average speed	Average trip speed	Speed and vehicle type/technology specific	National and regional inventories
Traffic situation	Road type, speed limits, level of congestion	Driving pattern (speed, acceleration etc) and vehicle type/technology specific	Environmental impact assessment, area-wide urban traffic management (UTM) assessment
Modal	Driving pattern, vehicle specific data – power, speed, emissions	Micro-scale modelling, typically 1 second intervals, individual vehicle specific	UTM assessment

## 1.2 The vehicle emissions prediction model (VEPM)

The vehicle emissions prediction model (VEPM) is an average speed model which predicts emission factors for the New Zealand fleet under typical road, traffic and operating conditions. VEPM provides tailpipe exhaust emission factors for CO, HC, NO<sub>x</sub>, CO<sub>2</sub> and particulates, as well as particulates from brake and tyre wear. VEPM does not currently estimate evaporative or crank case emissions.

VEPM was originally developed for the Auckland Regional Council in 2008 to estimate tailpipe exhaust emission factors for the regional emissions inventory. The model has also been widely used for assessments of air quality effects of transport projects.

Average speed models are based on the fact that the average emissions factor for a pollutant and vehicle type/technology varies as a function of the average speed during a trip.

The emissions factors used for average speed models are based on the results of thousands of empirical tests. These tests use drive cycles representing real life driving conditions rather than the cycles used for regulatory compliance. The cycles have a wide range of different operating conditions, ie acceleration rates, maximum speeds, periods of idle etc, and hence a similarly wide range of average speeds. A low average speed is typical of driving in congested traffic and vice versa.

In addition to the range of driving conditions, the data must also cover the range of vehicle types and technologies. These include:

- vehicle type – passenger cars, light commercial and heavy commercial
- fuel type (diesel or petrol) and specification (eg sulphur content)
- engine capacity<sup>A</sup>
- engine technology – emissions standard to which the vehicle is built.

At time of preparation (pre-2008) there was insufficient emissions test data from New Zealand domiciled vehicles to develop VEPM using New Zealand data. The New Zealand fleet includes vehicles that have been manufactured to various emission standards including Japanese, European and Australian. These different jurisdictions have introduced different emission requirements at different times and have used different emission measurement techniques. This inconsistency means that international emission models are not directly applicable to the New Zealand fleet. VEPM was therefore developed using New Zealand fleet data and emissions data from a range of international models. Given the makeup of the New Zealand fleet, and other emissions models in use around the world, emissions data from Japan, USA, Australia and Europe were investigated for the development of VEPM.

The majority of New Zealand new passenger car and light commercial fleet is manufactured to European emission standards.

For vehicles manufactured to European emission standards, the UK National Atmospheric Emissions Inventory (NAEI) was selected as the most appropriate source of emission factors for development of VEPM. The NAEI model was supplemented with emissions data from other sources, including the available New Zealand data, where practicable. It also incorporated features from other models, eg emission factors for heavy duty vehicles and cold start emissions factors from the European Computer Model to Calculate Emissions from Road Transport (COPERT). This is a model that has been under development since the 1990s for the creation of national emissions inventories for EU countries.

---

<sup>A</sup> Engine capacity is important for estimation of fuel consumption and CO<sub>2</sub> emissions but is less important for other emissions of other pollutants. Harmful emissions (PM, CO etc) are primarily dependent on the engine technology and are not a direct function of fuel use.

The UK database has been updated a number of times since the development of VEPM in 2009.<sup>09</sup> Emission factors in the UK database for NO<sub>x</sub>, PM and HC are now based on the COPERT model.

Since 2009, updated emission factors have been published in COPERT for Euro 5, Euro 6 (light duty)<sup>10</sup> and Euro V, Euro VI (heavy duty)<sup>11</sup> vehicles. Therefore, emission factors in this VEPM 5.3 have been updated based on emission factors from the COPERT model for these vehicle classes.

A substantial proportion of the passenger car and light commercial fleet is second hand Japanese domestic vehicles, which are manufactured to Japanese vehicle emission standards. Japanese vehicle emissions factors would have been ideal for these vehicles. However at the time that VEPM was developed, available emissions data was insufficient to be able to develop a comprehensive model based on Japanese data. For these vehicles, detailed comparison was undertaken to assign the closest equivalent European emission factor for each Japanese vehicle class and each pollutant as described in the technical report<sup>01</sup>. This approach has also been used internationally<sup>8</sup>.

Changes in cars manufactured overseas will eventually be seen in the New Zealand fleet. It is therefore important that VEPM contains the latest internationally available information and that its relevance for New Zealand conditions is optimised.

VEPM was released as version 3.0 in 2008<sup>01</sup> with subsequent releases as version 5.0 and 5.1 in 2012 and 5.3 in 2017.

Details of this process are available in the supporting technical reports which are available on the Transport Agency's website at [www.hip.nzta.govt.nz](http://www.hip.nzta.govt.nz).

### 1.3 Version 5.3

In 2016, the Transport Agency commissioned an update of key assumptions and emission factors in Vehicle Emission Prediction Model (VEPM), which was last updated in 2012 (EFRU, 2012). These include:

- Updating the fleet.
- Incorporating nitrogen dioxide (NO<sub>2</sub>) in VEPM
- Updating emission standards that are assumed for vehicles entering the fleet.
- Updating country of origin assumptions.
- Updating emission factors for Euro 5, 6 and V.
- Adding Euro VI emission standards.

Details are provided in the *Vehicle emission prediction model technical updates: technical report*.<sup>12</sup>

---

**09** Department for Environment, Food & Rural Affairs (2016) *Emission Factors .Toolkit v7.0 User Guide*, UK

---

**10** European Environment Agency (2016) *EMEP/EEA Air Pollutant Emission Inventory Guidebook 2013*

---

**11** European Environment Agency (2016) *EMEP/EEA Air Pollutant Emission Inventory Guidebook 2016*

---

**12** Emission Impossible Ltd (2017) *Vehicle Emission Prediction Model technical updates: technical report (DRAFT)*

---

**B** The developers of COPERT used a similar process to develop emission factors for Cyprus where the vehicle fleet is also dominated by Japanese used imports.


## 1.4 Purpose

VEPM has been developed by Auckland Council, and the Transport Agency to quantify vehicle emissions and predict how these are likely to change over time. The model can estimate the effect that new technology and improved fuel will have on emissions from New Zealand's vehicle fleet. This is done through the use of back-casting for previous years, estimates for current years and projections for future years.

The model can be used in regional and national emissions inventories to determine whether 'business-as-usual' policies and trends will be sufficient to ensure the national environmental standards for air quality (AQNES) and other ambient air quality guidelines will be met.

VEPM is also a critical tool used in assessments of environmental effects (AEEs) for road projects. The model provides vehicle emission factors, which are used in conjunction with traffic models and air dispersion models to predict air pollutant concentrations downwind of the road. VEPM emission factors are used in the Transport Agency Screening Tool ([www.hip.nzta.govt.nz](http://www.hip.nzta.govt.nz)), which is a simple online tool to assist with undertaking preliminary or screening assessments. VEPM is also used in more detailed assessments. A schematic of the detailed assessment process using VEPM is shown in figure 1.1.

FIGURE 1.1 VEPM and the assessment process

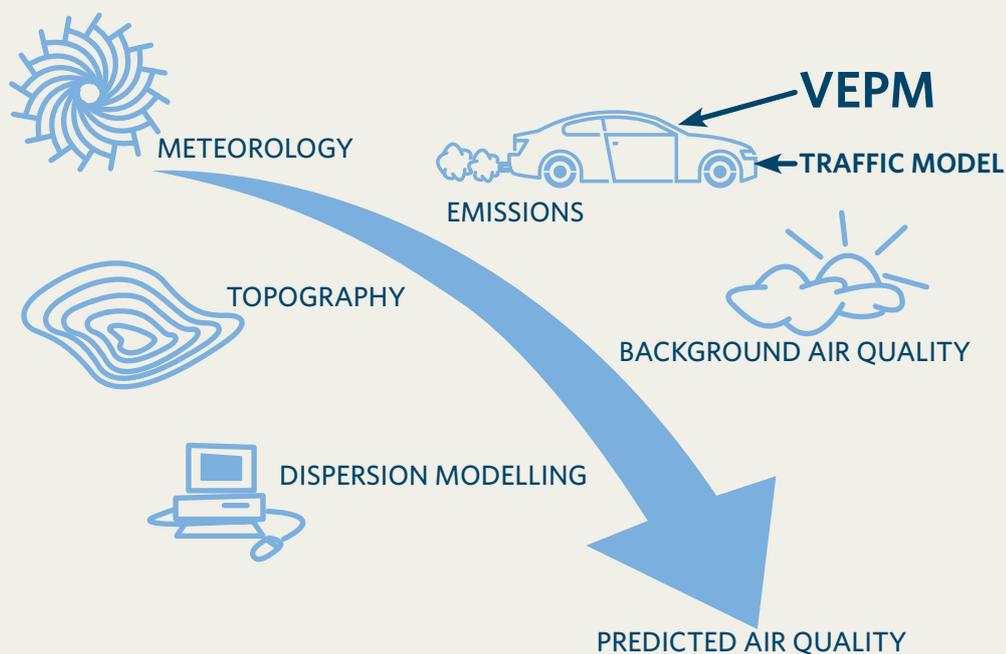

13 Transport Agency (2014) *Guide to assessing air quality impacts from state highway projects v2.0 (Draft)*  
[www.hip.nzta.govt.nz](http://www.hip.nzta.govt.nz)

The Transport Agency Guide to assessing air quality impacts from state highway projects<sup>13</sup> provides specific guidance for using VEPM to assess potential air quality effects associated with state highway asset improvement projects.

## 1.5 Limitations

As discussed in previous sections, VEPM is an average speed model which provides fleet averaged emission factors. It is intended to represent:

- Typical driving behaviour
- typical congestion levels (at the user defined speed)
- typical road types
- vehicles from Europe and Japan
- fleet averaged emission characteristics for each vehicle category (for example, the NO<sub>x</sub> emission factor for EURO I petrol cars is representative of NO<sub>x</sub> emissions from the average EURO I petrol car, however there may be considerable variation in NO<sub>x</sub> emissions from individual vehicles).

Emission factors from VEPM will not accurately represent:

- extreme driver behaviour
- emissions from a particular vehicle
- micro events, eg emissions over a short time period at a particular location.

VEPM is generally appropriate for assessments of air quality effects where average emissions are required over 1 hour or 24 hour assessment periods for the 'average fleet'. VEPM can account for variation in the fleet composition (eg the proportion of heavy duty vehicles) and local data should be used where possible.

Some specific limitations of the VEPM model are summarised below.

### EVAPORATIVE AND CRANK CASE EMISSIONS

- VEPM 5.1 does not include evaporative or crank case emission factors.

### BUS EMISSION FACTORS

- Bus emission factors are assumed to be the same as heavy commercial vehicle emission factors in VEPM 5.3. Auckland Council has a bus emissions prediction model which provides for more detailed analysis of emissions from buses and covers emissions classes up to and including Euro V, J05, US07 and factors for alternative fuels/hybrid buses. In late 2016, Greater Wellington Regional Council established emission factors for a more comprehensive and up to date range of bus technologies but these are yet to be incorporated into a specific bus emission prediction model. Further information about modelling undertaken by these councils is available from the VEPM helpdesk.

### BRAKE AND TYRE WEAR EMISSION FACTORS

- Brake and tyre wear emission factors in VEPM 5.1 are based on European emission factors. In New Zealand most roads are chipseal, so brake and tyre wear emission factors could potentially be higher.

### HEAVY COMMERCIAL VEHICLE EMISSION FACTORS

- Heavy commercial vehicles contribute disproportionately to emissions. The heavy commercial vehicle emission factors in VEPM have not been calibrated or compared with any New Zealand specific emission test data. This is a significant gap in our current knowledge of vehicle emissions in New Zealand.



# 2 Using VEPM

This section provides step-by-step instructions on running VEPM and the various options available to users.

Technical user support is available from the VEPM helpdesk [environment@nzta.govt.nz](mailto:environment@nzta.govt.nz)

## 2.1 Getting started

Open the spreadsheet and enable macros. The spreadsheet should open in sheet named VEPM 5.1 as shown in figure 2.1.

FIGURE 2.1 Screen shot of VEPM worksheet for entering fleet/emissions data

**Vehicle Emissions Prediction Model 5.3**

Entry required in white cells. Entry optional in grey cells

Year:

Run Number:

Fleet Profile				
	Weight category	Fuel type	% of VKT	
			Default values 2001	Optional user entry
Cars	< 3.5 t	Petrol	72.3%	
	< 3.5 t	Diesel	7.0%	
	< 3.5 t	Hybrid	0.0%	
LCV	< 3.5 t	Petrol	6.3%	
	< 3.5 t	Diesel	7.9%	
	< 3.5 t	Hybrid	0.0%	
HCV	3.5 - 7.5 t	Diesel	1.6%	
	7.5 - 12 t	Diesel	0.8%	
	12 - 15 t	Diesel	0.3%	
	15 - 20 t	Diesel	0.3%	
	20 - 25 t	Diesel	1.4%	
	25 - 30 t	Diesel	1.0%	
Buses	> 30 t	Diesel	0.7%	
				100%

Optional Inputs			
	Default values	Optional user entry	Options
Average trip length (km)	9.1		8 to 25
Ambient temperature °C	13.1		-10 to 30
Petrol fuel type - see worksheet	6		0 to 7
Diesel fuel type - see worksheet	5		0 to 5
Consider cold start?	yes		no
Consider degradation?	yes		no
% of catalyst not working - old vehicles	15%		0-100%
% of catalyst not working - new vehicles	0%		0-100%
Gradient	0%		±2, 4, 6
Heavy vehicles: load	50%		0, 100%
Number of wheels			
Vehicle type	Default values	Optional user entry	
Car	4		
LCV	4		
HCV 3.5-7.5 t	6		
HCV 7.5-12 t	6		
HCV 12-15 t	8		
HCV 15-20 t	8		
HCV 20-25 t	8		
HCV 25-30 t	8		
HCV >30 t	8		
Buses >3.5 t	6		
Brake and tyre PM output	PM10		

Average Speeds		
Cars	50	km/h
LCV's	50	km/h
HCV's/buses	50	km/h

Max. valid HCV speed range for selected load and gradient is 6 - 86 km/h

The main worksheets the user will use or view are:

- VEPM: Enter fleet/emissions data (shown above in figure 2.1)
- fleet emission factors: calculated fleet weighted emissions factors (green coloured tab)
- fleet profile: a detailed fleet profile (green coloured tab)
- summary: summary of results for up to 20 runs (green coloured tab)
- fuel types: For information only - summary of fuel properties (green coloured tab)
- bulk run: enables the user to perform many runs automatically (blue coloured tab)
- bulk input: enables the user to input data for performing many runs automatically (dark blue coloured tab).

Some users may also wish to view the sheets which calculate emissions factors:

- EU and NZ front: emission factor calculation for the European and New Zealand new fleets.
- Japan front: Emission factor calculation for the Japanese fleet.

All other worksheets are hidden to avoid confusion. The user may unhide worksheets by right clicking on the worksheet name tab and then selecting unhide. All worksheets are password protected to avoid accidental changes or deletion.

## 2.2 Input data - VEPM worksheet

Data is input on the *VEPM* worksheet shown in figure 2.1. Data entry is required in cells that are white, and is optional for cells shaded light grey. All other cells are locked to prevent accidental changes or deletion. Some cells have informative comments entered (as indicated by the red triangle at the top right of the cell) which are displayed when the cursor is moved over that cell.

Details of input parameters on the *VEPM* worksheet are described as follows:

### YEAR

The analysis year must be between 2001 and 2040. VEPM selects an emissions profile for the New Zealand fleet using the year selected.

### RUN NUMBER

Run number must be between 1 and 20. Summary results will be automatically copied into the *Summary* worksheet for the selected run number. This will overwrite any previous results for that run number. A run number is not strictly necessary, but no results will be copied to the *Summary* worksheet if one is not entered.

### FLEET PROFILE (OPTIONAL USER ENTRY)

Percentage of vehicle kilometres travelled (VKT) by each vehicle class can be based on either user defined or default values. Wherever possible, site-specific data, or data from nearby locations should be used to estimate the proportion of diesel vehicles, particularly HCVs.

The default fleet profile is based on results from the Ministry of Transport Vehicle fleet emissions model (VFEM). The VFEM output includes actual Land Transport New Zealand<sup>c</sup> fleet data up to 2014, with projections out to 2040.

For the selected year, the model will use the MOT fleet profile for that particular year. When user defined values are inputted, the %VKT must add to 100%. The model will use default values for any vehicle class where a user defined value is not specified. This means that for any vehicle class with no VKT, the user must specify 0% to override default values.

*Users tip: As a starting point, it is worthwhile running VEPM for a number of years to see how the fleet profile changes in the model. To do this, type in the year (eg 2001) and the run number (eg 1) and then click on the run button. The model will run using default values and jump to the output in the *Summary* worksheet. Go back to the VEPM entry page (as shown in figure 2.1) and type in another year (eg 2010) and another run number (eg 2) and then click on the run button again. Repeat for the years 2020, 2030 and 2040 (runs 3, 4 and 5 respectively). The summary page should look as shown in figure 2.2.*

*This simple exercise shows how the fleet profile is projected to change between 2001 (72.3% petrol cars) and 2040 (41.4% petrol cars) reflecting a large shift towards hybrid cars (from 0% hybrid in 2001 to 24.0% hybrid in 2040).*

FIGURE 2.2 Output summary from default VEPM fleets for years 2001 through 2040

Output Summary																											
Runs				Fleet composition													Fleet weighted emissions factors										
Run number	Year	Speed Car	Speed LCV	Speed HCV	Light Duty Vehicles <3.5t									Diesel HCV >3.5t				CO	CO2	VOC	NOx	NO2	PM <sub>10</sub>	PM <sub>2.5</sub>	PM	FC	
					% Car petrol	% Car diesel	% Car hybrid	% LCV petrol	% LCV diesel	% LCV hybrid	% Diesel	% HCV 3.5-7.5t	% HCV 7.5-12t	% HCV 12-18t	% HCV 18-20t	% HCV 20-25t	% HCV 25-30t										% HCV >30t
1	2001	50	50	50	72.3%	7.0%	0.0%	0.3%	7.9%	0.0%	0.4%	1.6%	0.8%	0.3%	0.3%	1.4%	1.9%	0.1%	0.79	232.53	0.99	1.63	0.12	0.0540	0.0099	10.29	
2	2010	50	50	50	70.1%	7.6%	0.2%	4.0%	11.1%	0.0%	0.6%	1.5%	0.8%	0.2%	0.3%	1.2%	1.1%	1.2%	5.38	238.32	0.45	1.03	0.11	0.0516	0.0099	10.21	
3	2020	50	50	50	63.1%	8.0%	2.7%	3.1%	15.4%	0.3%	0.6%	1.2%	0.7%	0.2%	0.4%	0.9%	1.5%	2.0%	1.84	223.39	0.16	0.61	0.09	0.0220	0.0099	9.28	
4	2030	50	50	50	50.3%	8.4%	14.1%	2.1%	15.6%	1.2%	0.6%	1.5%	0.8%	0.3%	0.4%	0.8%	1.6%	2.2%	0.95	191.17	0.05	0.32	0.06	0.0065	0.0099	7.60	
5	2040	50	50	50	41.4%	7.0%	24.0%	1.8%	15.6%	1.6%	0.6%	1.7%	0.8%	0.2%	0.4%	0.8%	1.7%	2.3%	0.59	172.31	0.05	0.24	0.04	0.0054	0.0099	6.98	
6																											
7																											
8																											
9																											
10																											
11																											
12																											
13																											
14																											
15																											
16																											
17																											
18																											
19																											
20																											

### AVERAGE SPEED

The model allows the user to define different average speeds for light and heavy duty vehicles. Average speeds must be between 10 and 110km/h (100km/h for heavy vehicles).

### OPTIONAL MODEL INPUTS

The optional model inputs are described in section 2.5.

## 2.3 Calculating emissions factors - VEPM worksheet

VEPM calculates a default fleet profile based on the user defined input parameters when the *Run Model* button on the *VEPM* worksheet is selected. The calculated fleet profile is displayed on the *Fleet profile* worksheet.

Calculated fleet average (or weighted) emissions factors and emissions factors by vehicle class are displayed in the *Fleet emissions factors* worksheet as shown in figure 2.3.

FIGURE 2.3 Fleet emission factors in VEPM 5.1

### Model Outputs

Fleet average emissions factors		
CO	0.59	g/km
CO2	172.31	g/km
VOC	0.05	g/km
NOx	0.24	g/km
NO2	0.04	g/km
PM <sub>2.5</sub> exhaust	0.0054	g/km
PM10 B and T	0.0099	g/km
FC	6.98	l/100km

Light vehicle fleet average emission factors		
CO	0.57	g/km
CO2	118.26	g/km
VOC	0.05	g/km
NOx	0.19	g/km
NO2	0.04	g/km
PM <sub>2.5</sub> exhaust	0.0027	g/km
PM10 B and T	0.0096	g/km
FC	5.59	l/100km

Heavy vehicle fleet average emission factors		
CO	0.83	g/km
CO2	621.13	g/km
VOC	0.06	g/km
NOx	0.84	g/km
NO2	0.09	g/km
PM <sub>2.5</sub> exhaust	0.0369	g/km
PM10 B and T	0.0145	g/km
FC	23.20	l/100km

Petrol car		
CO	1.20	g/km
CO2	147.73	g/km
VOC	0.11	g/km
NOx	0.13	g/km
NO2	0.00	g/km
PM <sub>2.5</sub> exhaust	0.0034	g/km
PM10 B and T	0.0096	g/km
FC	6.50	l/100km

Diesel HCV (3.5-7.5t)		
CO	0.55	g/km
CO2	293.77	g/km
VOC	0.13	g/km
NOx	1.59	g/km
NO2	0.18	g/km
PM <sub>2.5</sub> exhaust	0.10	g/km
PM10 B and T	0.0121	g/km
FC	11.00	l/100km

Diesel car		
CO	0.10	g/km
CO2	141.69	g/km
VOC	0.02	g/km
NOx	0.86	g/km
NO2	0.26	g/km
PM <sub>2.5</sub> exhaust	0.0087	g/km
PM10 B and T	0.0096	g/km
FC	5.37	l/100km

Diesel HCV (7.5-12.0t)		
CO	0.73	g/km
CO2	444.46	g/km
VOC	0.07	g/km
NOx	1.13	g/km
NO2	0.12	g/km
PM <sub>2.5</sub> exhaust	0.05	g/km
PM10 B and T	0.0121	g/km
FC	16.61	l/100km

Petrol LCV		
CO	0.82	g/km
CO2	226.37	g/km
VOC	0.03	g/km
NOx	0.08	g/km
NO2	0.00	g/km
PM <sub>2.5</sub> exhaust	0.0018	g/km
PM10 B and T	0.0096	g/km
FC	7.39	l/100km

Diesel HCV (12.0 - 15.0t)		
CO	0.66	g/km
CO2	463.02	g/km
VOC	0.05	g/km
NOx	0.95	g/km
NO2	0.10	g/km
PM <sub>2.5</sub> exhaust	0.03	g/km
PM10 B and T	0.0145	g/km
FC	17.30	l/100km

Diesel LCV		
CO	0.00	g/km
CO2	210.30	g/km
VOC	0.00	g/km
NOx	0.36	g/km
NO2	0.11	g/km
PM <sub>2.5</sub> exhaust	0.0027	g/km
PM10 B and T	0.0096	g/km
FC	8.23	l/100km

Diesel HCV (15.0 - 20.0t)		
CO	0.74	g/km
CO2	555.06	g/km
VOC	0.04	g/km
NOx	0.64	g/km
NO2	0.06	g/km
PM <sub>2.5</sub> exhaust	0.02	g/km
PM10 B and T	0.0145	g/km
FC	20.73	l/100km

Hybrid and Electric		
CO	0.021	g/km
CO2	56.03	g/km
VOC	0.0004	g/km
NOx	0.0071	g/km
NO2	0.0002	g/km
PM <sub>2.5</sub> exhaust	0.0000	g/km
PM10 B and T	0.0096	g/km
FC	2.44	l/100km

Diesel HCV (20.0 - 25.0t)		
CO	0.88	g/km
CO2	692.29	g/km
VOC	0.03	g/km
NOx	0.58	g/km
NO2	0.05	g/km
PM <sub>2.5</sub> exhaust	0.01	g/km
PM10 B and T	0.0145	g/km
FC	25.85	l/100km

Diesel HCV (25.0 - 30.0t)		
CO	0.91	g/km
CO2	746.61	g/km
VOC	0.03	g/km
NOx	0.55	g/km
NO2	0.05	g/km
PM <sub>2.5</sub> exhaust	0.01	g/km
PM10 B and T	0.0145	g/km
FC	27.88	l/100km

Diesel HCV (> 30.0t)		
CO	1.03	g/km
CO2	845.82	g/km
VOC	0.03	g/km
NOx	0.50	g/km
NO2	0.04	g/km
PM <sub>2.5</sub> exhaust	0.01	g/km
PM10 B and T	0.0145	g/km
FC	31.57	l/100km

The *Summary* worksheet displays fleet weighted emissions factors for up to 20 runs.

These fleet weighted emissions factors are calculated based on the fraction of vehicle kilometres travelled (%VKT) by each vehicle class, and the emissions factors for each vehicle class (from *EU & NZ front* and *Japan front* worksheets).

### REPEAT A PREVIOUS RUN

When the *Repeat a previous run* button is selected, the user is prompted to select a previous run number. User inputs are copied from the *Summary* worksheet into the *VEPM* worksheet. This avoids the need for re-entry if the run needs to be repeated.

### BULK RUNS

Instructions for conducting bulk runs are given in section 2.4 below and the *Bulk Runs* worksheet.

## 2.4 Input data – bulk run

The *Bulk Runs* worksheet provides the option for users to perform multiple runs at the same time. The input format is tabular and allows users to repeat a run multiple times with an incremental change in one (or more) parameters, such as running through every speed from 10 to 110km/h (100km/h for heavy vehicles<sup>d</sup>) for the same year.

In the *Bulk Run* worksheet, click the *Go To Input Sheet* button to open the *Bulk Input* worksheet to enter bulk run parameters (as detailed below for the *Bulk Input* worksheet).

### BULK INPUT

Similar to the *VEPM* worksheet, users are required to input the year, average speed for cars, LCVs and HCVs, and the desired brake and tyre wear particulate size fraction.

*Year* – analysis year must be between 2001 and 2040.

*Average speeds* must be between 10 and 110km/h (100km/h for heavy vehicles).

*Brake & tyre wear particulate* size fraction options are:

- TSP - total suspended particles
- PM<sub>10</sub> – particulate matter less than 10µm in diameter
- PM<sub>2.5</sub> – particulate matter less than 2.5µm in diameter
- PM<sub>1</sub> – particulate matter less than 1µm in diameter
- PM<sub>0.1</sub> – particulate matter less than 0.1µm in diameter.

Optional model inputs, as described in section 2.5, can also be specified in the *Bulk Input* worksheet. Up to 1,000 multiple runs can be selected. Multiple runs should be ordered to reduce processing time, so for example, if multiple runs for five years are selected at five different speeds for each year, the speeds should be ordered by increment for each year first, and then the year. This is further explained in the *Bulk Run* worksheet with an example below in figure 2.4. The bulk run in figure 2.4 varies the average speed between 10km/h and 110km/h for light vehicles and between 10km/h and 100km/h for heavy vehicles<sup>d</sup> (for the years 2010, 2020 and 2040).



D Valid average speed range for heavy vehicles varies depending upon load and gradient.

FIGURE 2.4 Example bulk input worksheet, varying speed (10-110km/h) and year (2001, 2020, 2040)

Required Inputs						Optional Inputs				
Run number	Year	Speed Car	Speed LCV	Speed HCV	B&T PM size	Light Duty Vehicles <3.5t				
						% Car petrol	% Car diesel	% Car hybrid	% LCV petrol	% LCV diesel
1	2001	10	10	10	PM10					
2	2001	20	20	20	PM10					
3	2001	30	30	30	PM10					
4	2001	40	40	40	PM10					
5	2001	50	50	50	PM10					
6	2001	60	60	60	PM10					
7	2001	70	70	70	PM10					
8	2001	80	80	80	PM10					
9	2001	90	90	90	PM10					
10	2001	100	100	100	PM10					
11	2001	110	110	110	PM10					
12	2020	10	10	10	PM10					
13	2020	20	20	20	PM10					
14	2020	30	30	30	PM10					
15	2020	40	40	40	PM10					
16	2020	50	50	50	PM10					
17	2020	60	60	60	PM10					
18	2020	70	70	70	PM10					
19	2020	80	80	80	PM10					
20	2020	90	90	90	PM10					
21	2020	100	100	100	PM10					
22	2020	110	110	110	PM10					
23	2040	10	10	10	PM10					
24	2040	20	20	20	PM10					
25	2040	30	30	30	PM10					
26	2040	40	40	40	PM10					
27	2040	50	50	50	PM10					
28	2040	60	60	60	PM10					
29	2040	70	70	70	PM10					
30	2040	80	80	80	PM10					
31	2040	90	90	90	PM10					
32	2040	100	100	100	PM10					
33	2040	110	110	110	PM10					
34										

Once all inputs for the bulk run have been entered, return to the *Bulk Run* worksheet to run the model.

#### BULK RUNS

Click the *Start Bulk Run* button to run the model once the inputs for the bulk runs have been entered in the *Bulk Input* worksheet. If the user requires a breakdown of emission factors by vehicle type, rather than total fleet emission factors, select the *Vehicle Type Breakdown* checkbox beneath the *Start Bulk Run* button. Ensure this box is checked before starting the model.

#### BULK OUTPUT

Results for the bulk runs selected by the user are displayed in the *Bulk Output* worksheet. Emission factors for CO, CO<sub>2</sub>, VOC, NOx, PM<sub>2.5</sub> exhaust and PM brake and tyre are provided according to the bulk inputs. If the *Vehicle Type Breakdown* checkbox had been selected by the user on the *Bulk Input* worksheet, then the remaining columns in the *Bulk Output* worksheet will also be populated.

Figure 2.5 presents the *Bulk Output* worksheet for the example input data shown in figure 2.4.

FIGURE 2.5 Example bulk output worksheet, varying speed (10-110km/h) and year (2001, 2020, 2040)

Run number	CO	CO2	VOC	NOx	NO2	PM <sub>2.5</sub> Exhaust	PM brake and tyre	FC	Year	Speed Car	Speed LCV	Speed HCV	B&T PM size
	g/km	g/km	g/km	g/km	g/km	g/km	g/km	l/100km					
1	28.5544	514.933	3.18691	2.42927	0.21673	0.256802088	0.009900083	23.1732	2001	10	10	10	PM10
2	17.2152	343.959	1.9075	1.85673	0.15535	0.152087069	0.009900083	15.3365	2001	20	20	20	PM10
3	12.7787	282.051	1.4132	1.67026	0.13278	0.113956257	0.009900083	12.4998	2001	30	30	30	PM10
4	11.1327	249.561	1.1622	1.6152	0.12317	0.094878233	0.009900083	11.0664	2001	40	40	40	PM10
5	9.78702	232.532	0.9897	1.62782	0.12013	0.084797694	0.009900083	10.2875	2001	50	50	50	PM10
6	8.62846	224.806	0.86479	1.67557	0.12078	0.080007618	0.009900083	9.90169	2001	60	60	60	PM10
7	7.95058	223.134	0.78113	1.7578	0.12431	0.078792502	0.009900083	9.79512	2001	70	70	70	PM10
8	7.68008	226.332	0.72921	1.86884	0.13009	0.08037156	0.009900083	9.91375	2001	80	80	80	PM10
9	7.8117	233.855	0.70448	2.0064	0.13787	0.08454201	0.009900083	10.2337	2001	90	90	90	PM10
10	8.41214	245.592	0.70524	2.17023	0.14757	0.091548775	0.009900083	10.7521	2001	100	100	100	PM10
11	9.6352	262.056	0.73186	2.36135	0.15925	0.10205327	0.009900083	11.4947	2001	110	110	110	PM10
12	5.65935	502.969	0.51234	1.37101	0.2194	0.071526971	0.009948027	20.9297	2020	10	10	10	PM10
13	3.24147	331.24	0.30583	0.96252	0.148	0.041376082	0.009948027	13.8209	2020	20	20	20	PM10
14	2.33739	269.397	0.22604	0.76661	0.11716	0.030228837	0.009948027	11.2298	2020	30	30	30	PM10
15	2.04141	239.099	0.18623	0.66418	0.10154	0.024839361	0.009948027	9.95692	2020	40	40	40	PM10
16	1.84319	223.385	0.15873	0.60847	0.09343	0.022034118	0.009948027	9.28073	2020	50	50	50	PM10
17	1.70782	216.196	0.13857	0.57932	0.08991	0.020746946	0.009948027	8.95204	2020	60	60	60	PM10
18	1.68503	214.82	0.12507	0.57042	0.08987	0.020541338	0.009948027	8.86265	2020	70	70	70	PM10
19	1.76031	218.03	0.11672	0.57753	0.09284	0.021261033	0.009948027	8.96006	2020	80	80	80	PM10
20	1.93458	225.393	0.11282	0.60434	0.09948	0.022964396	0.009948027	9.22398	2020	90	90	90	PM10
21	2.22098	236.675	0.11308	0.65125	0.11011	0.025836428	0.009948027	9.64309	2020	100	100	100	PM10
22	2.64519	251.88	0.1174	0.70985	0.12392	0.030176327	0.009948027	10.2167	2020	110	110	110	PM10
23	1.53428	393.607	0.14452	0.54215	0.08632	0.015877223	0.009920416	15.509	2040	10	10	10	PM10
24	0.97303	259.488	0.09274	0.37369	0.06332	0.010020617	0.009920416	10.4928	2040	20	20	20	PM10
25	0.74787	209.19	0.07118	0.29759	0.05264	0.007539262	0.009920416	8.51743	2040	30	30	30	PM10
26	0.6585	184.829	0.05919	0.26027	0.0468	0.006200449	0.009920416	7.52206	2040	40	40	40	PM10
27	0.59193	172.315	0.0506	0.24028	0.04338	0.005414548	0.009920416	6.97817	2040	50	50	50	PM10
28	0.53523	166.804	0.04405	0.23027	0.04158	0.004945298	0.009920416	6.70088	2040	60	60	60	PM10
29	0.50276	166.195	0.03935	0.22812	0.04123	0.004681014	0.009920416	6.60852	2040	70	70	70	PM10
30	0.49898	169.493	0.03622	0.23328	0.04247	0.004572397	0.009920416	6.66005	2040	80	80	80	PM10
31	0.53597	176.402	0.03463	0.24764	0.04581	0.004613004	0.009920416	6.841	2040	90	90	90	PM10
32	0.63129	186.62	0.03461	0.27315	0.05193	0.004820334	0.009920416	7.13712	2040	100	100	100	PM10
33	0.80769	199.923	0.0362	0.31001	0.06126	0.005238878	0.009920416	7.53805	2040	110	110	110	PM10



## 2.5 Optional model inputs

This section discusses optional model inputs for VEPM as shown in figure 2.1.

### AVERAGE TRIP LENGTH

The model allows the user to define average trip lengths. Trip length is used to calculate cold start emissions. So for example, a shorter average trip length will result in higher average emissions because the proportion of the trip in cold start conditions is higher. The default value in VEPM is 9.1km.

### AMBIENT TEMPERATURE

Ambient temperature must be between -10 and 30°C. Ambient temperature affects cold start emissions, with higher emissions at lower temperatures. The default is set at 13.1°C to reflect an average winter temperature in Auckland. For specific times, or other locations, this variable should be adjusted.

### PETROL/DIESEL FUEL TYPE

The default fuel type correlates with the fuel that was, or is expected to be available at the analysis year (year selected in VEPM worksheet). Fuel specifications are summarised in the *Fuel types* worksheet.

### CONSIDER COLD START?

When a vehicle is started from cold, emissions are substantially higher, until the engine and catalyst warm up. Cold start emissions are estimated in the model for each vehicle class except heavy commercial vehicles (HCVs). Cold start emissions are affected by the user defined ambient temperature and average trip length. Cold start emissions factors are not available for HCVs. It is likely that commercial vehicles spend the majority of their life in use, hence cold start is not a significant factor in their operation.

### CONSIDER DEGRADATION?

The model includes some allowance for degradation of emissions over time. This option allows the user to ignore degradation effects. If the user chooses to ignore degradation effects, the results will reflect vehicles with 50,000km of accumulated mileage for cars and light duty vehicles, and no accumulated mileage (ie new) for heavy duty vehicles.

### PERCENTAGE OF CATALYTIC CONVERTERS NOT WORKING - OLD VEHICLE

Emissions from vehicles without catalytic converters are substantially higher than from vehicles with a functioning catalytic converter. This option allows the user to estimate the percentage of catalytic converters that are broken or have been removed. The default value of 15% for old vehicles is based on studies undertaken by the MOT<sup>13,14</sup>. This variable is applied to petrol vehicles approximately 11 years and older.

For diesel vehicles, there is currently no option in VEPM to estimate the percentage of removed or broken emission control equipment.

### PERCENTAGE OF CATALYTIC CONVERTERS NOT WORKING - NEW VEHICLE

This variable is applied to petrol vehicles less than 11 years old. The Ministry of Transport studies indicated that very few vehicles younger than 11 years had catalytic converters removed, hence the default value is set at 0. However, the sample size of newer vehicles from which the data was obtained was very small.

### GRADIENT

---

**13** Ministry of Transport (2009) *A vehicle scrappage trial for Christchurch and Wellington*.  
[www.transport.govt.nz](http://www.transport.govt.nz)

---

**14** Ministry of Transport (2008) *Trial vehicle scrappage report*.  
[www.transport.govt.nz](http://www.transport.govt.nz)

Road gradients between -6% and +6% can be selected in 2% increments for both light and heavy duty vehicles.

For light duty **petrol** vehicles, emissions factors for gradients other than 0% are only available for CO and NO<sub>x</sub>. For light duty **diesel** vehicles, emission factors are only available for CO, NO<sub>x</sub> and PM.

NB: This means that when the model is run for selected gradients for light duty vehicles, the outputs for HC and CO<sub>2</sub> will be for 0% gradient.

The impact of gradient on emissions is complex, affecting different pollutants by differing amounts. This is discussed in greater detail in section 4.

### LOAD


Loading factors for HCVs of 0, 50% and 100% can be selected. The default loading is 50%.

### NUMBER OF WHEELS

The amount of particulate matter from brake and tyre wear is calculated based on the average number of wheels for each vehicle class. The number of wheels for the HCV and bus classes can be adjusted if required.

### BRAKE AND TYRE WEAR PM OUTPUT

The size fraction of PM from brake and tyre wear is selectable - total suspended particles (TSP), PM<sub>10</sub>, PM<sub>2.5</sub>, PM<sub>1</sub> and PM<sub>0.1</sub> (see glossary for definitions).

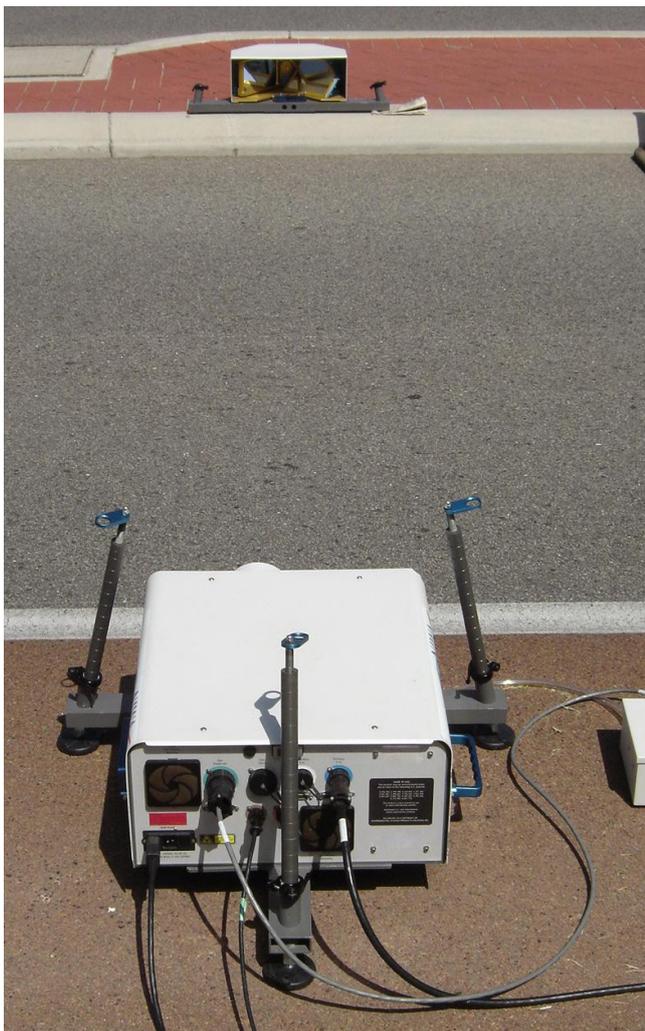

# 3 Emission factor calculations in VEPM

This section of the user guide provides a brief introduction to the calculations and assumptions in VEPM and refers users to the relevant parts of the technical reports (references O1, O2 and O3) and the VEPM spread sheet for further details.

## 3.1 Overall structure of VEPM

VEPM calculates total emission factors for each vehicle category. Vehicle categories in VEPM include:

### CARS

- Petrol cars (<1.4L, 1.4L to 2L, and >2L)
- Diesel cars (<2L and > 2L)
- Hybrid cars
- Plug in hybrid cars
- Electric cars



### LIGHT COMMERCIAL VEHICLES

- Petrol light commercial vehicles (LCVs)
- Diesel LCVs



### BUSES

- All buses are assumed to have equivalent emissions to HCV's in VEPM




### HEAVY COMMERCIAL VEHICLES

- Diesel HCVs
- Broken down by gross vehicle weight

These categories are further broken down by country of origin and year of manufacture. The vehicle categories included in VEPM are listed in full in Tables A.1, A.2 and A.3 in appendix A.

The calculation of total emission factors for each vehicle category is described in section 3.2. These total emission factors are combined with detailed fleet composition data to calculate fleet weighted emission factors as described in section 3.3.

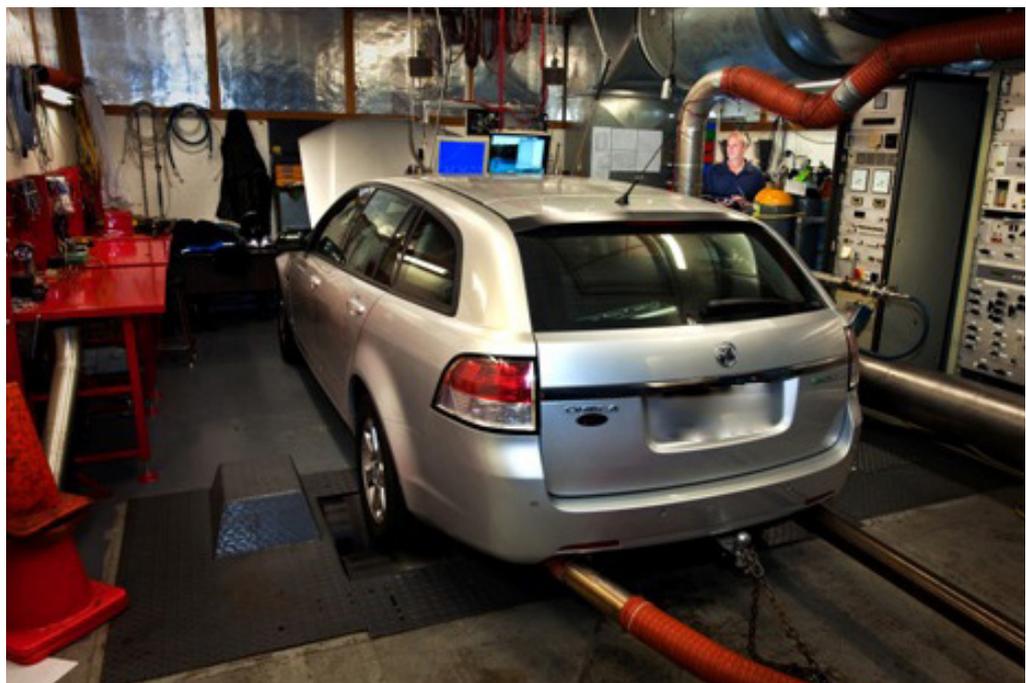

## 3.2 Calculation of total emission factors

The calculation of total emission factors is shown schematically in figure 3.2. This shows the key steps of the emission factor calculation, as well as the user defined inputs that provide variables for each key step. Figure 3.2 also provides references to the relevant sections of the technical reports where the methodology and assumptions are described in detail.


Total emissions for each vehicle category are calculated in the *EU and NZ front* worksheet (for European and New Zealand manufactured vehicles) and in the *Japan front* worksheet (for Japanese vehicles).

Users can see all calculations in these worksheets. The total emission factors for each vehicle category are calculated and displayed in columns CC to CI of the *EU and NZ front* and the *Japan front* worksheets. For example, as shown in figure 3.1, VEPM estimates a total NO<sub>x</sub> emission factor of 0.7g/km for Japanese vehicles manufactured between 1986 and 1999 with engine capacity between 1.4 and 2L. This is based on speed of 50km/hour and default input values, these are discussed in section 2.5.

FIGURE 3.1 Data from the 'Japan front' worksheet for the 2001 default fleet in VEPM

			Total Emissions Factors							
			CO	CO2	HC	NO <sub>x</sub>	NO2	PM	PM (Brake & Tyre wear)	FC
1.0 Cars			(g/km)	(g/km)	(g/km)	(g/km)	(g/km)	(g/km)	(g/km)	(l/100km)
<b>1.1 Petrol</b>		<b>Model yr</b>								
Pre 1973, J73	< 1.4l	<b>50 - 74</b>	46.1	161	3.7	2.2	0.1	0.023	0.0096	9.9
Pre 1973, J73	1.4 - 2.0l	<b>50 - 74</b>	38.9	198	3.7	2.7	0.1	0.019	0.0096	11.1
Pre 1973, J73	> 2.0l	<b>50 - 74</b>	33.8	271	3.5	3.7	0.1	0.017	0.0096	14.0
J75, J76	< 1.4l	<b>75 - 77</b>	21.0	142	1.2	3.9	0.2	0.005	0.0096	7.5
J75, J76	1.4 - 2.0l	<b>75 - 77</b>	13.5	185	0.8	4.7	0.2	0.005	0.0096	8.9
J75, J76	> 2.0l	<b>75 - 77</b>	7.8	271	0.6	6.6	0.3	0.006	0.0096	12.4
J78	< 1.4l	<b>78 - 85</b>	19.9	144	1.1	1.1	0.0	0.005	0.0096	7.5
J78	1.4 - 2.0l	<b>78 - 85</b>	12.5	187	0.7	1.0	0.0	0.005	0.0096	8.9
J78	> 2.0l	<b>78 - 85</b>	7.0	273	0.5	0.9	0.0	0.006	0.0096	12.4
J78, J88	< 1.4l	<b>86 - 99</b>	18.5	140	0.3	0.3	0.0	0.003	0.0096	7.2
J78, J88	1.4 - 2.0l	<b>86 - 99</b>	10.8	182	0.4	0.6	0.0	0.002	0.0096	8.6
J78, J88	> 2.0l	<b>86 - 99</b>	5.1	266	0.2	0.6	0.0	0.005	0.0096	11.9
J00	< 1.4l	<b>00 - 04</b>	1.3	151	0.1	0.1	0.0	0.002	0.0096	6.7
J00	1.4 - 2.0l	<b>00 - 04</b>	0.3	183	0.0	0.1	0.0	0.001	0.0096	8.0
J00	> 2.0l	<b>00 - 04</b>	0.2	252	0.0	0.1	0.0	0.005	0.0096	11.0
J05	< 1.4l	<b>&gt; 05'</b>	0.6	141	0.009	0.0	0.0	0.002	0.0096	6.2
J05	1.4 - 2.0l	<b>&gt; 05'</b>	0.6	166	0.028	0.0	0.0	0.001	0.0096	7.3
J05	> 2.0l	<b>&gt; 05'</b>	0.3	239	0.0	0.1	0.0	0.005	0.0096	10.4
Total			<b>10.6</b>	<b>192</b>	<b>0.4</b>	<b>0.6</b>	<b>0.0</b>	<b>0.003</b>	<b>0.0096</b>	<b>9.0</b>

FIGURE 3.2 Calculation of total emissions factors by vehicle category in VEPM

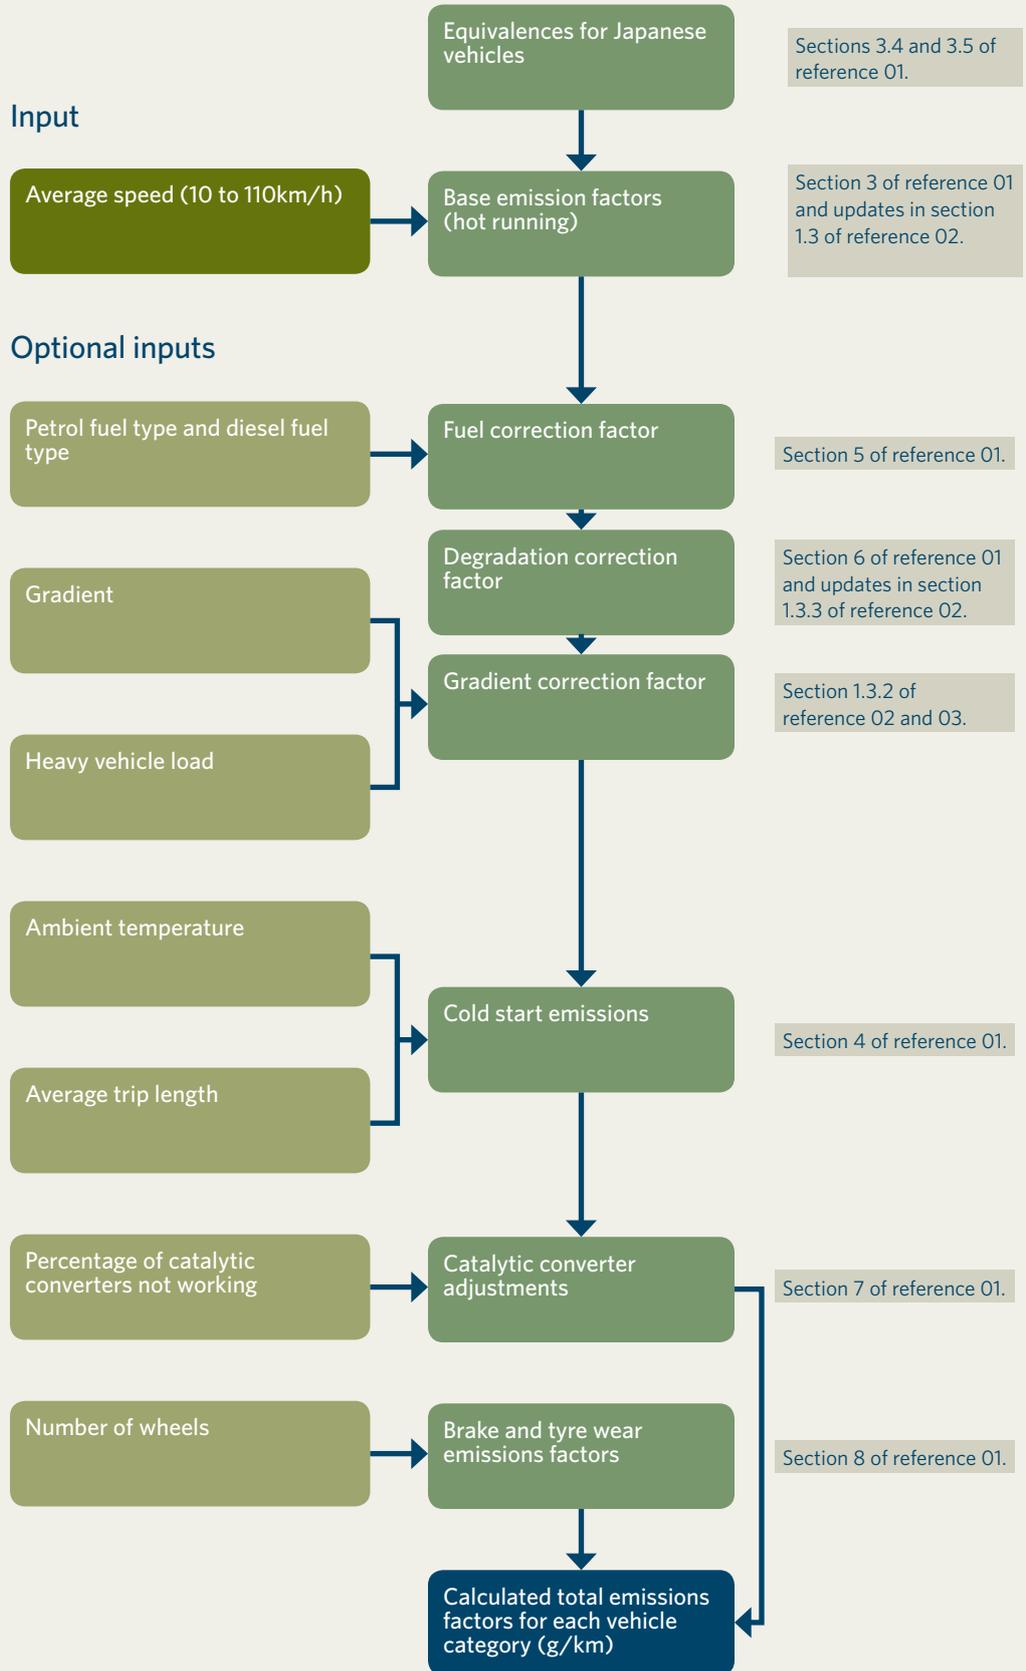

EQUATION 3.1 **Total emission factor**

EQUATION	PARAMETER	DESCRIPTION	UNIT
$E = s(m) \times f \times g \times E_{hot} + E_{cold}$	$E$	Total emission factor	g/km
	$s$	Degradation correction factor for a given accumulated vehicle mileage $m$	-
	$f$	Fuel correction factor and is the ratio of emissions for the test fuel compared with a base or reference fuel	-
	$G$	Gradient correction factor	-
	$E_{hot}$	Hot running emissions factor	-
	$E_{cold}$	Cold emissions contribution to $E$ (function of trip duration and ambient temperature)	g/km


The equation is expanded to account for the proportion of vehicles with catalytic converters not working, as described in section 7 of reference O1.

Brake and tyre wear particulate emission factors are calculated separately. These are based on USEPA emission factors as described in section 8 of reference O1.



### 3.3 Calculation of fleet weighted emission factors in VEPM

The calculation of fleet weighted emission factors is shown schematically in figure 3.3.

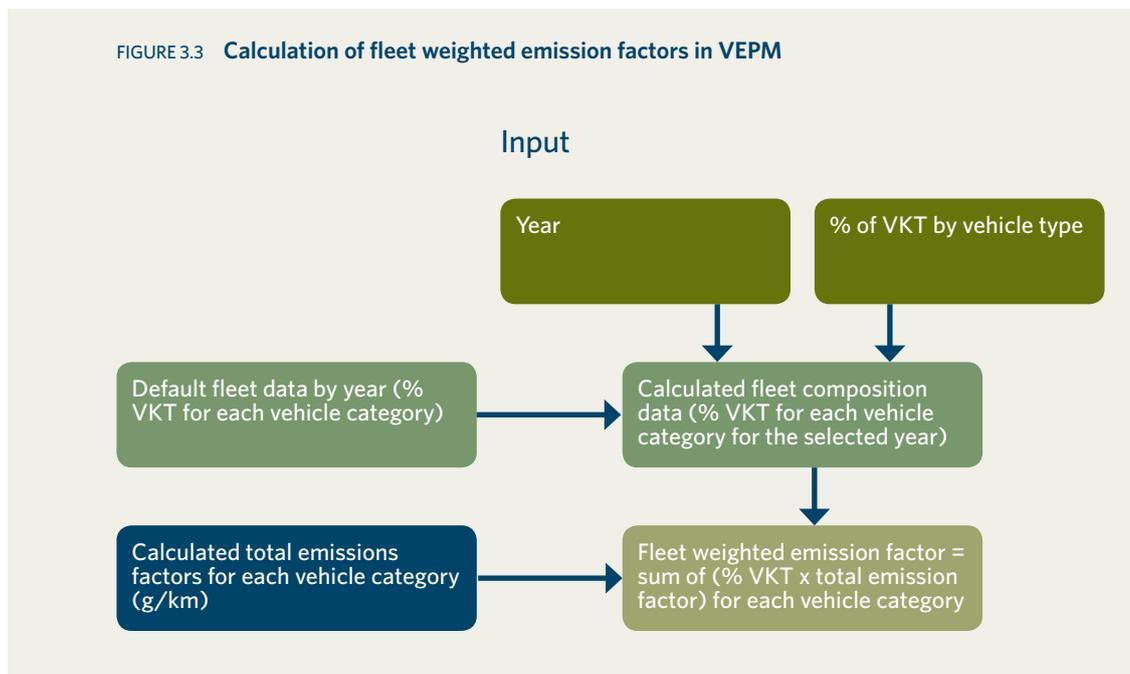

#### DEFAULT FLEET DATA

Default fleet data (percentage VKT for each vehicle category) is included in VEPM for all years between 2001 and 2040. The default is based on data provided by Ministry of Transport from the Vehicle Fleet Emissions Model (VFEM). VFEM outputs include actual fleet composition data, projected fleet composition data and estimated average annual VKT for each vehicle category.

The procedure for calculating default percentage VKT in VEPM based on the VFEM outputs is described in section 1.3.5 of reference 02.

#### CALCULATED FLEET COMPOSITION DATA

The percentage VKT for each vehicle category is calculated within VEPM based on the default fleet data for the year selected. If the user defines the % of VKT by vehicle category, the default fleet data is adjusted proportionally.

The percentage of VKT for each vehicle category can be seen in the EU and NZ front and the Japan front worksheets. For example, VEPM estimates that 30.62% of all VKT for the default 2001 fleet is from Japanese vehicles manufactured between 1986 and 1999 with engine capacity between 1.4L and 2L (figure 3.4).

#### CALCULATION OF FLEET WEIGHTED EMISSION FACTORS

The fleet weighted average emission factor per kilometre is calculated as the sum of the percentage of VKT for each vehicle category x total emission factor for each vehicle category.


Vehicle categories are shown in tables A.1, A.2 and A.3 in appendix A.

The calculation of total emission factors for each vehicle category is described in section 3.2.

Fleet weighted emission factors are displayed in the *Fleet emission factors* worksheet as described in section 2.3.

FIGURE 3.4 Data from the *Japan front* worksheet for the 2001 default fleet in VEPM

			Fleet info
<b>1.0 Cars</b>			<b>% VKT</b>
<b>1.1 Petrol</b>			
Title		Model yr	
Pre 1973, J73	< 1.4l	50 - 74	0.00%
Pre 1973, J73	1.4 - 2.0l	50 - 74	0.00%
Pre 1973, J73	> 2.0l	50 - 74	0.00%
J75, J76	< 1.4l	75 - 77	0.00%
J75, J76	1.4 - 2.0l	75 - 77	0.00%
J75, J76	> 2.0l	75 - 77	0.00%
J78	< 1.4l	78 - 85	0.32%
J78	1.4 - 2.0l	78 - 85	1.97%
J78	> 2.0l	78 - 85	0.28%
J78, J88	< 1.4l	86 - 99	1.09%
J78, J88	1.4 - 2.0l	86 - 99	20.29%
J78, J88	> 2.0l	86 - 99	3.60%
J00	< 1.4l	00 - 04	0.00%
J00	1.4 - 2.0l	00 - 04	0.02%
J00	> 2.0l	00 - 04	0.00%
J05	< 1.4l	> 05'	0.00%
J05	1.4 - 2.0l	> 05'	0.00%
J05	> 2.0l	> 05'	0.00%
Total			27.57%

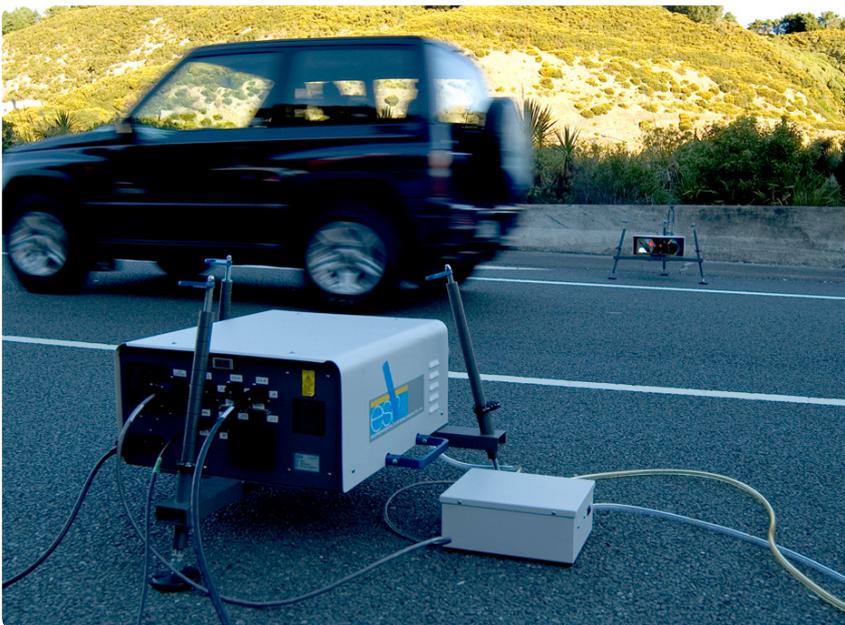

# 4 Emissions information

## 4.1 Particulate matter

VEPM 5.1 includes emission factors for particulate matter from two sources:

- Exhaust
- Road/tyre wear.

In reality, almost all particulate matter (PM) from both petrol and diesel exhaust is less than 1 micron, with the majority of PM from both fuels being in the 10-100 nanometre range. In VEPM 5.1, exhaust PM is denoted as PM<sub>2.5</sub>.

PM from road and tyre wear, however, are substantially larger with around 40% of PM being total suspended particulate (10 – 300 nanometre)<sup>15</sup>.

In VEPM 5.1, the size fraction of PM from brake and tyre wear is selectable – total suspended particles (TSP), PM<sub>10</sub>, PM<sub>2.5</sub>, PM<sub>1</sub> and PM<sub>0.1</sub>. Brake and tyre wear emission factors are split into these fractions according to the proportions given in table 4.1.

<sup>15</sup> EMEP/EEA (2009) *Air pollution emission inventory guidebook*, 1.A.3.b.vi Road vehicle tyre and brake wear.

TABLE 4.1 Size distribution of tyre and brake wear particles as proportions of total suspended particulate (TSP)

PARTICLE SIZE CLASS	MASS FRACTION OF TSP	
	TYRE WEAR	BRAKE WEAR
TSP	1.000	1.000
PM <sub>10</sub>	0.600*	0.980
PM <sub>2.5</sub>	0.420*	0.390
PM <sub>1</sub>	0.060*	0.100
PM <sub>0.1</sub>	0.048*	0.080

\*Denotes that 60% (by mass) of tyre wear particles are smaller than 10 micron, 42% are smaller than 2.5 micron, 6% are smaller than 1 micron and 4.8% are smaller than 0.1 micron.



## 4.2 Gradient effects

As noted above, the impact of gradient on emissions is complex. It cannot be assumed that if the region over which emissions are being assessed has a net zero change in elevation, the increase in emissions due to uphill sections within the region will be cancelled out by the effects of the corresponding downhill sections. This is because, depending on the gradient, emissions going uphill are significantly greater than the reduction in emissions going downhill.

For example, NO<sub>x</sub> is only produced when the combustion temperature exceeds a threshold temperature, and is highly dependent on the fuel/air mixture strength. Maximum NO<sub>x</sub> occurs with mixtures slightly leaner than the chemically correct mixture, and falls rapidly with mixtures leaner or richer than this. Consequently the increase in NO<sub>x</sub> as a result of the increased power demand on an uphill section will be larger than the corresponding decrease on a similar downhill section.

This is illustrated in table 4.2 which shows the emissions rates predicted using VEPM 5.1 for CO, HC, NO<sub>x</sub>, PM and CO<sub>2</sub> for fully laden 15 to 20 tonne trucks (combined fleet) over a number of routes at 50km/h average speed. The first route is a constant zero gradient, the others consist of positive (uphill) gradients of 2%, 4% and 6%, followed by equal length corresponding negative (downhill) gradients. Table 4.2 also includes arithmetic averages of the positive and negative gradients, i.e. an average of zero gradient, and the difference between the arithmetic average and constant zero gradient.

TABLE 4.2 Emissions rates for fully laden trucks for a level road and different gradients

GRADIENT	EMISSIONS RATES (G/KM)				
	CO	HO	NO <sub>2</sub>	PM	CO <sub>2</sub>
0%	1.46	0.46	5.00	0.22	679
+2%	2.00	0.47	8.80	0.29	1164
-2%	0.78	0.30	1.84	0.14	262
Average 0% (+2%/-2%)	1.39	0.39	5.32	0.22	713
Difference wrt 0%	-5%	-15%	+6%	0	+5%
+4%	2.90	0.49	12.49	0.41	1735
-4%	0.42	0.19	0.73	0.10	111
Average 0% (+4%/-4%)	1.66	0.34	6.61	0.26	923
Difference wrt 0%	+14%	-26%	+32%	+18%	+36%
+6%	3.82	0.53	15.97	0.54	2312
-6%	0.26	0.14	0.36	0.08	56
Average 0% (+6%/-6%)	2.04	0.34	8.17	0.31	1184
Difference wrt 0%	+40%	-26%	+63%	+41%	+74%

The difference in NO<sub>x</sub> emissions between the level road and the positive gradients is clearly greater than between the level road and negative gradients, with the difference increasing with increasing gradient/engine load.

The overall result of these characteristics is that assuming a net zero gradient change for a region that contains significant changes in gradient (ie more than 2%) could significantly underestimate the emissions of CO, NO<sub>x</sub>, PM and CO<sub>2</sub>, and overestimate HC, for heavy duty vehicles.

### 4.3 Link lengths


When VEPM was originally developed, the recommendation was that the minimum grid size (or single link length) should be 1km.

In order to investigate the accuracy of VEPM over these short distances a test programme was undertaken<sup>02</sup>. Emissions from real drive cycles with a variety of speed profiles were compared with VEPM emission factors using a suitably instrumented vehicle driven repeatedly over a 1km length of mainly flat road in the Auckland CBD containing nine intersections in one direction and eight in the other.

From the data obtained using on-board instrumentation, three speed ~ time profiles were selected representing the lowest (7.5km/h), highest (32km/h) and one intermediate (15.5km/h) average speed. All three profiles were then reproduced on the University of Auckland's transient chassis dynamometer. The fuel consumption/CO<sub>2</sub> and regulated emissions (CO, HC and NO<sub>x</sub>) were measured over these profiles and compared with VEPM predictions based on the average speed for each profile.

Figure 4.1 shows measured CO<sub>2</sub> emissions and predicted CO<sub>2</sub> emissions over an average speed range of 3km/h to 50km/h. Results are shown for the full 1km route length and for a 100m length with an intersection in the middle. Two runs were also done at steady speeds of 30km/h and 50km/h for reference.

FIGURE 4.1 CO<sub>2</sub> emissions - average speed: predicted and measured

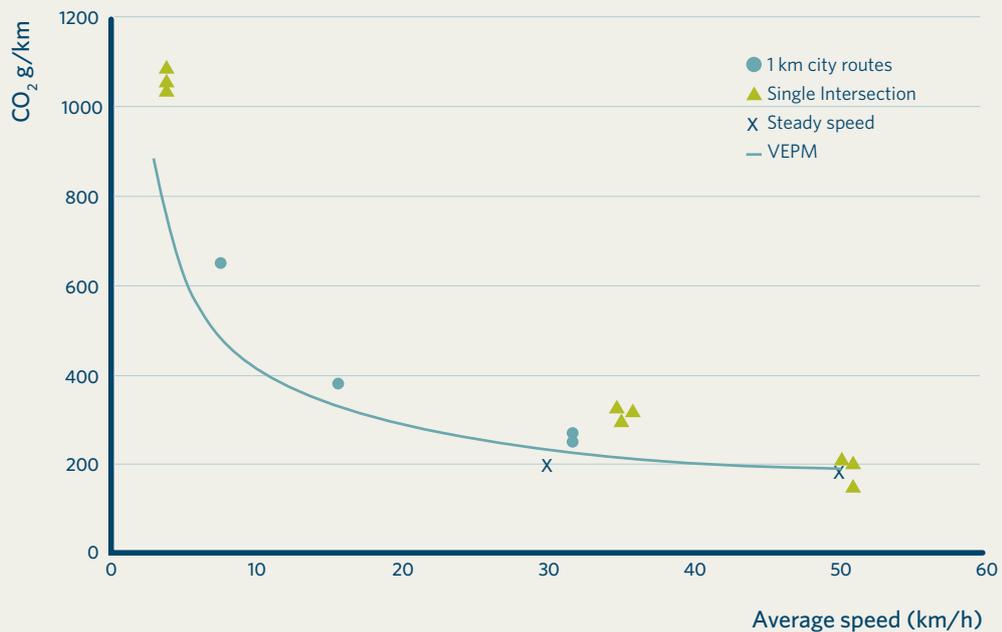

Taking into account that the test vehicle had a 3L engine, and VEPM uses aggregated emissions factors for engine sizes over 2L, both the full 1km route and the intersection figures show good agreement between measurements and predictions. On the basis of this test<sup>02</sup>, albeit on only one vehicle, it would appear that VEPM can be used with equal confidence for regional size studies down to short link length studies.

The results for the other emissions were not as good as for CO<sub>2</sub>. This is considered to be a reflection of the variation in emissions that occurs between vehicles, as has been reported by other researchers, rather than of the fundamental accuracy of VEPM.


## 4.4 Speed variation

Other than under motorway or rural conditions, driving speeds are seldom constant. While the emissions factors used in VEPM are based on a wide range of real life driving conditions, comprising of accelerations, decelerations, cruise and idle, there have been questions over the accuracy of an average speed model when there are significant variations in speed around the average.

The test programme described in section 4.2 also provides useful data from which some conclusions may be drawn as to the speed variation ~ average speed relationship.

Figure 4.2 shows the speed ~ longitude/distance profile for the various runs along the test route. As can be seen, the speeds varied widely over the route, with some runs having speeds varying from 0km/h to 47km/h. However, as illustrated in figure 4.1, the measured CO<sub>2</sub> agreed well with the VEPM predictions over the whole average speed range.

FIGURE 4.2 Longitude profile for 1km Auckland CBD test route (vertical coloured bars show intersections)

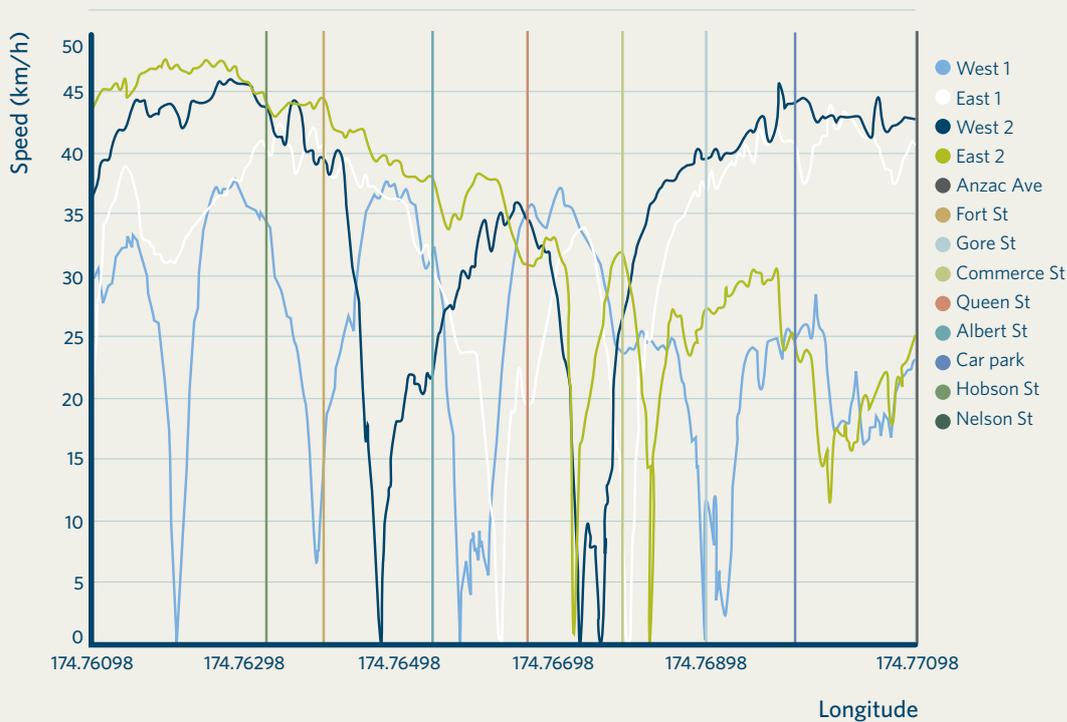

## 4.5 Idle emissions rates

Emissions rates for vehicles at idle are often required for the purposes of estimating pollutant concentrations, particularly at intersections.

These rates would normally be obtained empirically and quoted in grams per minute (g/min) or grams per hour (g/h). However, as this data is not available for the NZ fleet VEPM can be used to predict idle emissions rates. The emissions factors used in VEPM are taken from different drive cycles for a wide range of average speeds. Lower average speeds consist of a greater proportion of the cycle being idle. Consequently, by calculating the trend for emissions rates at low average speeds, an approximation of emissions rates at idle can be obtained.

The following gives examples of how this can be done.

Tables 4.3 and 4.4 show the 2011 fleet average CO and NO<sub>x</sub> emissions factors and emissions rates from 10 to 25km/h and figures 4.3 and 4.4 show plots of the emission rates.

TABLE 4.3 CO emissions factors and rates at low speeds

SPEED (KM/H)	EMISSION FACTOR (G/KM)	EMISSION RATE (G/H)
25	6.11	153
20	7.01	140
15	8.46	127
10	11.32	113

TABLE 4.4 NO<sub>x</sub> emissions factors and rates at low speeds

SPEED (KM/H)	EMISSION FACTOR (G/KM)	EMISSION RATE (G/H)
25	0.86	21.5
20	0.94	18.8
15	1.07	16.05
10	1.33	13.3

Extrapolating the lines back to the (zero speed) y-axis will give approximate values for the idle rates, ie 85g/h for CO and 8g/h for NO<sub>x</sub> as shown by the dashed lines in figures 4.3 and 4.4.

FIGURE 4.3 CO emissions rates at low speeds


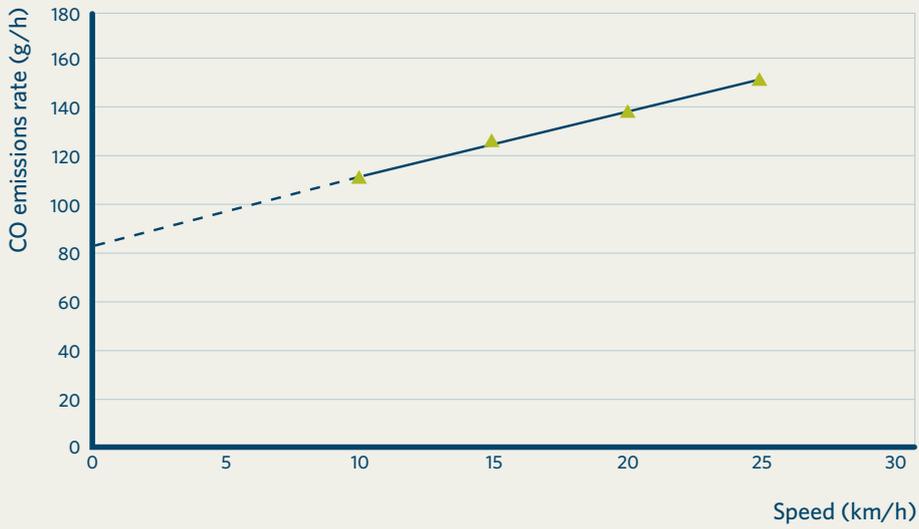


FIGURE 4.4 NO<sub>x</sub> emissions rates at low speeds

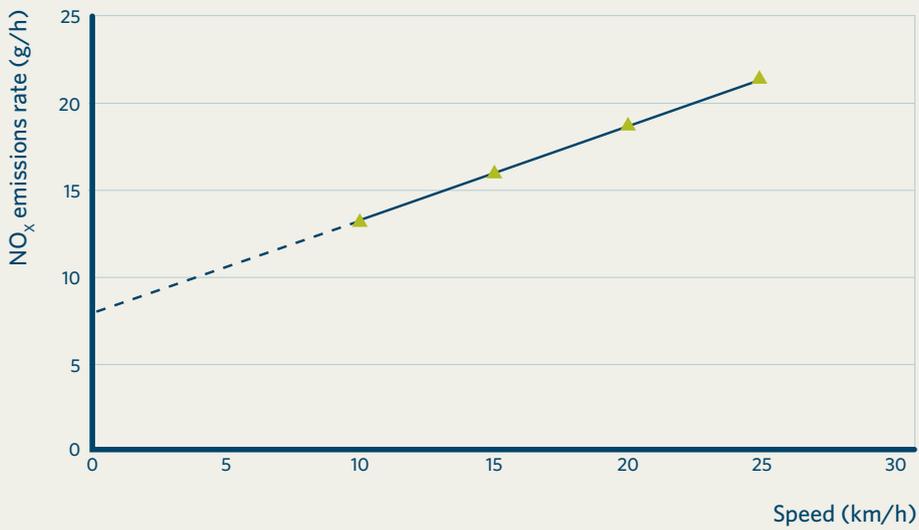

# 5 Validation of VEPM

The emissions factors used in VEPM are primarily from overseas databases. To give confidence that VEPM is valid for New Zealand conditions, the correlation between VEPM emission factors and those obtained from local testing on New Zealand domiciled vehicles (where this data is available) has been investigated.

## 5.1 New Zealand vehicle emissions factors database

Over the past 20 years the University of Auckland has undertaken emissions tests on hundreds of vehicles and produced thousands of emissions factors. These factors have been collated into a single database<sup>16</sup>.

The database has limitations in that it is made up of predominantly vehicles older than model year 2000, and also contains only a small number of diesel vehicles. However, within these constraints, there are sufficient factors to be able to make valid comparisons between the New Zealand test results and VEPM predictions.


Figures 4.1, 4.2 and 4.3 show comparisons between CO for ECE15.03<sup>D</sup> emission specifications for petrol vehicles, HC for Euro 2 specification vehicles and NO<sub>x</sub> for diesel Euro 3 vehicles. The database report includes comparisons for all other vehicle categories.

Overall, comparison of the database results with VEPM emission factors for light duty petrol vehicles shows that:

- in general the VEPM emission factors agree reasonably well with the database results for CO and HC
- for NO<sub>x</sub> emissions, there is some discrepancy between the database results and the VEPM emission factors. For some vehicle classes there is not good agreement between the average emission factors from VEPM and the results in the database for NO<sub>x</sub> and in some cases the emission-speed trends are different
- there is generally very good agreement between the database and the VEPM results for fuel consumption.

While the sample size was small for the diesel vehicles, there was reasonable correlation between VEPM predictions and the test results.

FIGURE 5.1 Comparison between database and VEPM CO results for ECE 15.03, 1400-2000cc petrol

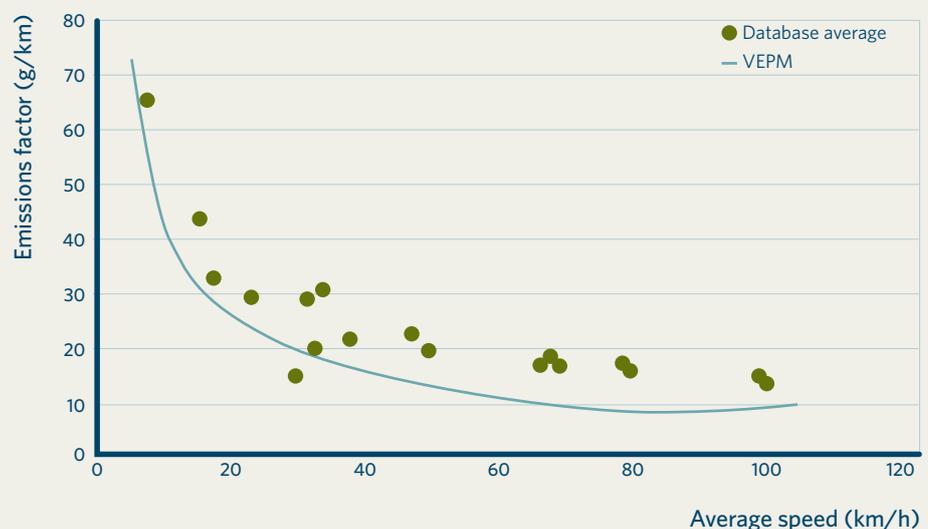

<sup>D</sup> ECE is the Economic Commission for Europe vehicle emissions legislation (pre Euro). ECE15.03 applies to passenger cars manufactured between approximately 1981 and 1985.

FIGURE 5.2 Comparison between database and VEPM HC results for Euro 2, 1400-2000cc petrol


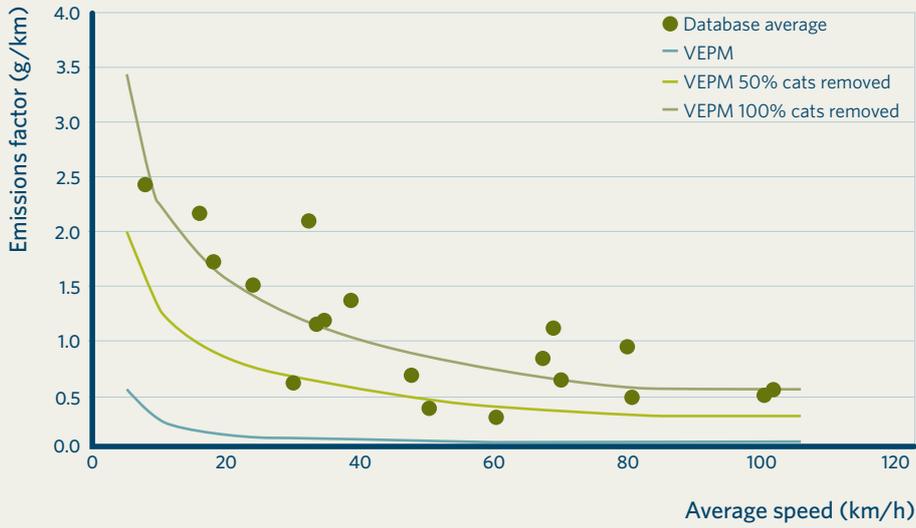


FIGURE 5.3 Comparison between database and VEPM NO<sub>x</sub> for Euro 3, >2000cc diesel LDVs

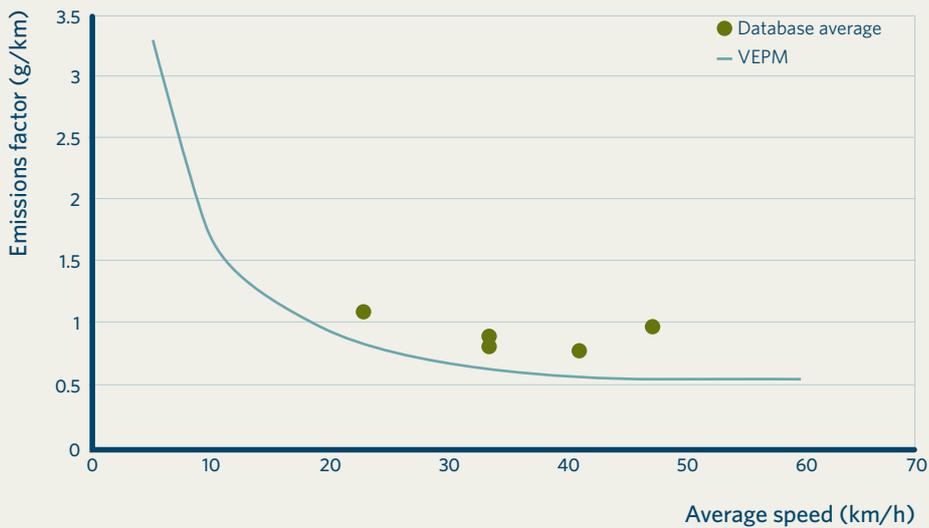

## 5.2 Validation of trends predicted by VEPM by comparison with measured trends in on-road vehicle emissions

Research<sup>12</sup> has been undertaken to compare the trends predicted in VEPM with real-world emission trends observed in Auckland remote sensing campaigns. Remote sensing samples the actual exhaust emissions of a large number of real-world vehicles in an on-road situation. Remote sensing has limitations and cannot replace dynamometer drive cycle testing. However, it does provide complimentary information that can be used to check and validate findings derived from a smaller number of drive cycle tests.

This project used remote sensing results from 2003, 2005, 2009 and 2011. The trends in measured carbon monoxide, nitric oxide (NO), hydrocarbons and uvSmoke (as an indicator of particulate matter) emissions were compared with the trends in predicted carbon monoxide, nitrogen oxides (NO<sub>x</sub>), hydrocarbons and particulate matter (PM<sub>10</sub>) emission factors.

The analysis found good agreement between fleet average trends predicted by VEPM and measured trends in average vehicle emissions for the light duty fleet overall between 2003 and 2011. However, when the results were broken down by vehicle type, there were two key exceptions:

- The trend in measured NO emissions (increasing) is contrary to the trend in predicted NO<sub>x</sub> emission factors (reducing) from diesel vehicles. This is consistent with the findings of a recent review undertaken in the UK<sup>E</sup>.
- The measured reduction in uvSmoke emissions is less than the predicted reduction in PM<sub>10</sub> emissions factors, especially for diesel vehicles.

The results suggest that the actual rate of reduction in NO<sub>x</sub> and PM<sub>10</sub> emissions from diesel vehicles is likely to be less than the theoretical rate of reduction predicted by VEPM.

## 6 Future updates

The VEPM stakeholder group provides governance on behalf of Auckland Council, the Transport Agency and the Ministry of Transport with respect to the funding, management, research and development, maintenance and ongoing support of the New Zealand Vehicle Emission Prediction Model.

The stakeholder regularly monitors international developments in emissions modelling. VEPM will be updated if any significant improvements or new data on emissions factors become available.

---

<sup>17</sup> UK Department of Environment, Flood and Rural affairs (2011). *Trends in NO<sub>x</sub> and NO<sub>2</sub> emissions and ambient measurements in the UK*. [www.accent-network.org](http://www.accent-network.org)

---

<sup>E</sup> A recent review in the UK found that ambient concentrations of total nitrogen oxides and nitrogen dioxide have not decreased by as much as suggested by current emission factors<sup>17</sup>. This review also found that total nitrogen oxides emission estimates based on remote sensing are higher than suggested by published emission factors.

# Appendix A

## Reference tables

TABLE A.1 Heavy duty vehicle categories in the VEPM model

FUEL TYPE	EMISSION LEGISLATIONS	ENGINE SIZE	APPROXIMATE YEAR OF MANUFACTURE
Diesel	Europe Pre-Euro	3.5-7.5t	< 1992
		7.5-16t	
		16-32t	
		> 32t	
	Europe Euro I	3.5-7.5t	1992-1995
		7.5-16t	
		16-32t	
		> 32t	
	Europe Euro II	3.5-7.5t	1996-2000
		7.5-16t	
		16-32t	
		> 32t	
	Europe Euro III	3.5-7.5t	2001-2005
		7.5-16t	
		16-32t	
		> 32t	
	Europe Euro IV	3.5-7.5t	2006-2008
		7.5-16t	
		16-32t	
		> 32t	
	Europe Euro V	3.5-7.5t	> 2008
		7.5-16t	
		16-32t	
		> 32t	
Japan Pre 1974	< 5t	1950-1973	
	5-12t		
	> 12t		
Japan J74, J77, J79, J82, J83, J87	< 5t	1974-1987	
	5-12t		
	> 12t		
Japan J88	< 5t	1988-1993	
	5-12t		
	> 12t		
Japan J94, J97	< 5t	1994-1997	
	5-12t		
	> 12t		
Japan J97	< 5t	1998-2002	
	5-12t		
	> 12t		
Japan J03	< 5t	1903-2004	
	5 - 12t		
	> 12t		
Japan J05	< 5t	> 2005	
	5-12t		
	> 12t		

TABLE A.2 Passenger car categories in the VEPM model

FUEL TYPE	EMISSION LEGISLATIONS	ENGINE SIZE	APPROXIMATE YEAR OF MANUFACTURE
Gasoline	Europe Pre-ECE	< 1.4L	< 1971
		1.4-2.0L	< 1971
		> 2.0L	< 1971
	Europe ECE 15.00/15.01	< 1.4L	1972-1977
		1.4-2.0L	1972-1977
		> 2.0L	1972-1977
	Europe ECE 15.02	< 1.4L	1978-1980
		1.4-2.0L	1978 - 1980
		> 2.0L	1978 - 1980
	Europe ECE 15.03	< 1.4L	1981 - 1985
		1.4-2.0L	1981 - 1985
		> 2.0L	1981 - 1985
	Europe ECE 15.04	< 1.4L	1985 - 1992
		1.4-2.0L	1985 - 1992
		> 2.0L	1985 - 1992
	Europe Euro I	< 1.4L	1992 - 1996
		1.4-2.0L	1992 - 1996
		> 2.0L	1992 - 1996
	Europe Euro II	< 1.4L	1997 - 2000
		1.4-2.0L	1997 - 2000
		> 2.0L	1997 - 2000
	Europe Euro III	< 1.4L	2001 - 2004
		1.4-2.0L	2001 - 2004
		> 2.0L	2001 - 2004
	Europe Euro IV	< 1.4L	> 2005
		1.4-2.0L	> 2005
		> 2.0L	> 2005
	New Zealand	< 1.4L	< 1987
		1.4-2.0L	< 1987
		> 2.0L	< 1987
	New Zealand	< 1.4L	1988 - 1992
		1.4 - 2.0L	1988 - 1992
		> 2.0L	1988 - 1992
	New Zealand	< 1.4L	1993 - 1997
		1.4 - 2.0L	1993 - 1997
		> 2.0L	1993 - 1997
	New Zealand	< 1.4L	1998 - 2002
		1.4-2.0L	1998 - 2002
		> 2.0L	1998 - 2002
	New Zealand	< 1.4L	> 2003
		1.4-2.0L	> 2003
		> 2.0L	> 2003
Japan Pre 1973, J73	< 1.4L	1950-1974	
	1.4-2.0L	1950-1974	
	> 2.0L	1950-1974	
Japan J75, J76	< 1.4L	1975-1977	
	1.4-2.0L	1975-1977	
	> 2.0L	1975-1977	
Japan J78	< 1.4L	1978-1985	
	1.4-2.0L	1978-1985	
	> 2.0L	1978-1985	
Japan J78, J88	< 1.4L	1986-1999	
	1.4 - 2.0L	1986-1999	
	> 2.0L	1986-1999	
Japan J00	< 1.4L	2000-2004	
	1.4-2.0L	2000-2004	
	> 2.0L	2000-2004	
Japan J05	< 1.4L	> 2005	
	1.4-2.0L	> 2005	
	> 2.0L	> 2005	

TABLE A.2 CONTINUED

FUEL TYPE	EMISSION LEGISLATIONS	ENGINE SIZE	APPROXIMATE YEAR OF MANUFACTURE
Diesel	Europe Pre-Euro I	> 2.0L	< 2002
		< 2.0L	< 2002
	Europe Euro I	> 2.0L	1992 - 1996
		< 2.0L	1992 - 1996
	Europe Euro II	> 2.0L	1997 - 2000
		< 2.0L	1997 - 2000
	Europe Euro III	> 2.0L	2001 - 2004
		< 2.0L	2001 - 2004
	Europe Euro IV	> 2.0L	> 2005
		< 2.0L	> 2005
	Japan Pre 1986	> 2.0L	1950 - 1985
		< 2.0L	1950 - 1985
	Japan J86	> 2.0L	1986 - 1991
		< 2.0L	1986 - 1991
	Japan J92, J94	> 2.0L	1992 - 1997
		< 2.0L	1992 - 1997
	Japan J98	> 2.0L	1998 - 2001
		< 2.0L	1998 - 2001
Japan J02	> 2.0L	2002 - 2004	
	< 2.0L	2002 - 2004	
Japan J05	> 2.0L	> 2005	
	< 2.0L	> 2005	
Hybrid			All years
Plug in hybrid			All years
Electric			All years

TABLE A.3 Light duty commercial vehicle categories in the VEPM model

FUEL TYPE	EMISSION LEGISLATIONS	ENGINE SIZE	APPROXIMATE YEAR OF MANUFACTURE
Gasoline	Europe Pre-Euro 1	< 3.5t	< 1993
	Europe Euro I	< 3.5t	1993-1997
	Europe Euro II	< 3.5t	1998-2001
	Europe Euro III	< 3.5t	2001-2006
	Europe Euro IV	< 3.5t	> 2006
	Japan J73, J75, J79	< 3.5t	1950-1979
	Japan J79, J81	< 3.5t	1980-1987
	Japan J88	< 3.5t	1988-2000
	Japan J01	< 3.5t	2001-2004
	Japan J05	< 3.5t	> 2005
Diesel	Europe Pre-Euro 1	< 3.5t	< 1992
	Europe Euro I	< 3.5t	1992-1996
	Europe Euro II	< 3.5t	1997-2000
	Europe Euro III	< 3.5t	1997-2004
	Europe Euro IV	< 3.5t	> 2005
	Japan Pre 1974, J74	< 3.5t	1950-1976
	Japan J77, J79	< 3.5t	1977-1981
	Japan J82, J83, J87	< 3.5t	1982-1987
	Japan J88	< 3.5t	1988-1992
	Japan J93	< 3.5t	1993-1996
	Japan J97, J03	< 3.5t	1997-2004
	Japan J05	< 3.5t	> 2005

# References

1. Energy and Fuels Research Unit, Auckland University (2008) *Development of a vehicle emissions prediction model*. [www.air.nzta.govt.nz](http://www.air.nzta.govt.nz)
2. Energy and Fuels Research Unit, Auckland University (2011) *Vehicle emissions prediction model (VEPM) version 5.0: development and user information report*. [www.air.nzta.govt.nz](http://www.air.nzta.govt.nz)
3. Energy and Fuels Research Unit, Auckland University (2012) *Vehicle emissions prediction model (VEPM) version 5.1*. [www.air.nzta.govt.nz](http://www.air.nzta.govt.nz)
4. World Road Association, PIARC Technical Committee on Road Tunnel Operation (C5) (2004) *Road tunnels: vehicle emissions and air demand for ventilation*. [www.piarc.org](http://www.piarc.org)
5. Energy and Fuels Research Unit, Auckland University (2010) *Vehicle emissions prediction model update: Phase 1*. [www.air.nzta.govt.nz](http://www.air.nzta.govt.nz)
6. Energy and Fuels Research Unit, Auckland University (2010) *Vehicle emissions prediction model update: Phase 2 progress report*. [www.air.nzta.govt.nz](http://www.air.nzta.govt.nz)
7. Energy and Fuels Research Unit, Auckland University (2011) *Vehicle emissions prediction model update: COPERT 4 review*. [www.air.nzta.govt.nz](http://www.air.nzta.govt.nz)
8. Energy and Fuels Research Unit, Auckland University (2011) *Cold start exhaust emissions performance: comparison of vehicle build technologies*. [www.air.nzta.govt.nz](http://www.air.nzta.govt.nz)
9. NZ Transport Agency (in preparation) *Tier 3 air quality detailed assessment guide*. [www.air.nzta.govt.nz](http://www.air.nzta.govt.nz)
10. Ministry of Transport (2011) *New Zealand vehicle fleet annual spreadsheet*. [www.transport.govt.nz](http://www.transport.govt.nz)
11. Auckland Council (2011) *Auckland motor vehicle emissions inventory for 2006*. [www.aucklandcouncil.govt.nz](http://www.aucklandcouncil.govt.nz)
12. NZ Transport Agency (2012) *Comparison of trends in modelled emission factors and real-world vehicle fleet emissions for the light duty fleet 2003 to 2011*. [www.air.nzta.govt.nz](http://www.air.nzta.govt.nz)
13. Ministry of Transport (2009) *A vehicle scrappage trial for Christchurch and Wellington*. [www.transport.govt.nz](http://www.transport.govt.nz)
14. Ministry of Transport (2008) *Trial vehicle scrappage report*. [www.transport.govt.nz](http://www.transport.govt.nz)
15. EMEP/EEA (2009) *Air pollution emission inventory guidebook, 1.A.3.b.vi Road vehicle tyre and brake wear*.
16. Energy and Fuels Research Unit, Auckland University (2012) *New Zealand vehicle emissions factors database*. [www.air.nzta.govt.nz](http://www.air.nzta.govt.nz)
17. UK Department of Environment, Flood and Rural affairs (2011). *Trends in NO<sub>x</sub> and NO<sub>2</sub> emissions and ambient measurements in the UK*. [www.accent-network.org](http://www.accent-network.org)

# Glossary

AVERAGE SPEED	The average speed for a transient driving cycle
cc	Cubic centimetre
CO	Carbon monoxide
CO <sub>2</sub>	Carbon dioxide
COPERT	Computer programme to calculate emissions from road transport
ECE	Economic Commission for Europe vehicle emissions legislation (pre Euro)
EMEP/EEA	European Monitoring and Evaluation Programme/European Environmental Agency
EPEFE	European Program on Emissions, Fuels and Engine Technologies
Euro	European vehicle emissions legislation
g/km	grams per kilometre
HC	Total hydrocarbons
HCV	Heavy commercial vehicle
kg	kilogram
km/h	kilometres per hour
L	Litre
LINK	In a road network, a portion of road between two intersections, junctions, interchanges or nodes. Its basic characteristics are length, vehicle speeds, travel times and number of lanes
MoT	Ministry of Transport
NAEI	National Atmospheric Emissions Inventory (United Kingdom)
NO <sub>x</sub>	Oxides of nitrogen, including nitric oxide, nitrogen dioxide and nitrous oxide
PM	Particulate matter
PM <sub>10</sub>	Particulate matter less than 10 µm in diameter
PM <sub>2.5</sub>	Fine particulate matter less than 2.5 µm in diameter
PM <sub>1.0</sub>	Fine particulate matter less than 1 µm in diameter
PM <sub>0.1</sub>	Fine particulate matter less than 0.1 µm in diameter
TSP	Total suspended particulates
VFEM	Vehicle Fleet Emissions Model
VKT	Vehicle kilometres travelled

## Further information

This document is available on the NZ Transport Agency's website  
[www.nzta.govt.nz](http://www.nzta.govt.nz)

### Disclaimer

The NZ Transport Agency has endeavoured to ensure material in this document is technically accurate and reflects legal requirements. However, the document does not override governing legislation. The NZ Transport Agency does not accept liability for any consequences arising from the use of this document. If the user of this document is unsure whether the material is correct, they should refer directly to the relevant legislation and contact the NZ Transport Agency.

## Our contact details

Environment and Urban Design Manager  
[environment@nzta.govt.nz](mailto:environment@nzta.govt.nz)